

C-VT-A-LVT4 Series

LED Linear Vapor Tight Light | Field Selectable CCT (Color Temperature) and Wattage
Replaces 2-lamp - T8 32W



THREE FIXTURES IN ONE

Our C-Lite Selectable LED Linear Vapor Tight delivers up to 5200 lumens and features a 36-inch cord for an easy installation. Select between 3500K, 4000K, and 5000K options, all within one fixture, and enjoy a 5-year warranty.

PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: Up to 5200 Lumens
- CRI: ≥ 80
- CCT: Selectable 3500K, 4000K and 5000K
- Input Power: 40W, 30W and 25W
- Dimmable: 0-10V dimming to 10%
- Estimated L70 Lifetime @ 25°C: > 75,000 hours
- Operating Temperature Range: -4°F to - 104°F (-20°C to 40°C)
- Power Factor: ≥ 0.9 at full load
- Total Harmonic Distortion: < 20% at full load
- Limited Warranty: 5-Years*
- Replaces: 2-lamp - T8 32W

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none">• FCC Part 15, Subpart B, Class B limits for conducted and radiated emissions• 36" 5-conductor cord for ease of install• Stainless steel clips	<ul style="list-style-type: none">• Storage Facilities• Task & Workshop• Hallways & Stairways	<ul style="list-style-type: none">• Universal (120V - 277V)

ORDERING INFORMATION

Example SKU: C-VT-A-LVT4-S5L-SCCT-UL-GR

C-VT	A	LVT4	S5L	SCCT	UL	GR
PRODUCT	SERIES	STYLE	FIELD SELECTABLE WATTAGE/LUMEN PACKAGE	FIELD SELECTABLE SCCT	VOLTAGE	COLOR
C-VT	A	LVT4 4-foot	S5L 5200 Lumens (40W)* 4500 Lumens (30W) 3500 Lumens (25W)	SCCT Warm White (3500K) Neutral White (4000K)* Cool White (5000K)	UL Universal 120V-277V	GR Gray


* Default settings at time of shipping are highest product wattage and 4000K.

CERTIFICATIONS:

CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov



C-VT-A-LVT4 Series

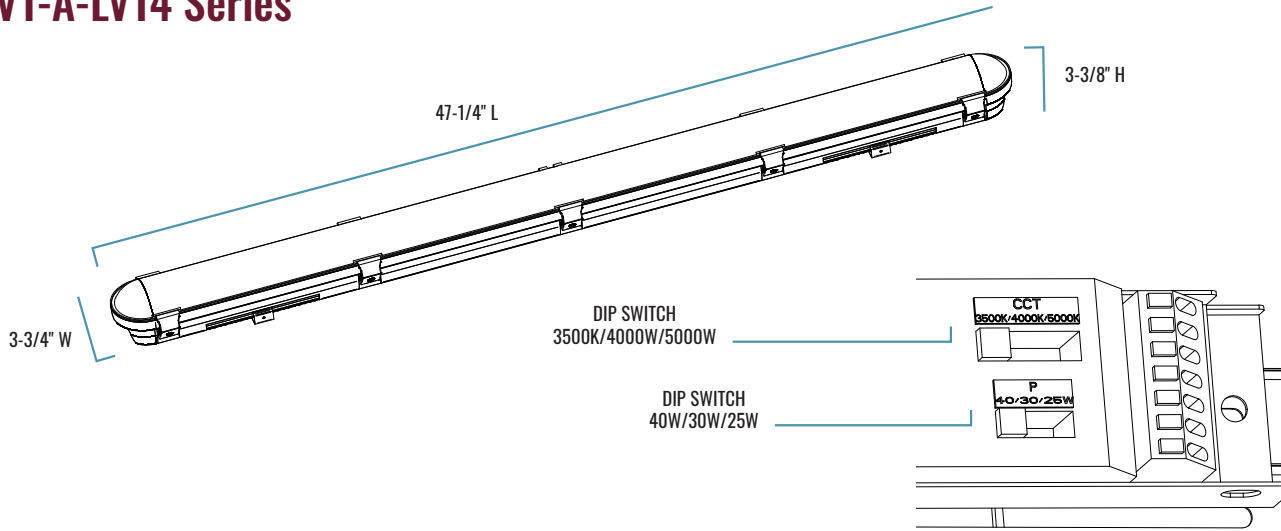

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT
47-1/4" L x 3-3/4" W x 3-3/8" H	4.40 lbs.	10 to 15 feet

FIXTURE SPECIFICATIONS

HOUSING	Gray, rugged, high-impact polycarbonate housing
LENS ASSEMBLY	High-impact polycarbonate frosted lens to help diffuse the light source and efficiently distribute the light evenly
MOUNTING	Surface mount with included stainless steel mounting clips

LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L ₇₀ LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION
-4°F to 104°F (-20°C to 40°C)	> 75,000 Hours	≥ 0.9 at full load	< 20% at full load

SKU	DISTRIBUTION	LUMEN OUTPUT	SYSTEM WATTS	CURRENT DRAW (AMPS)			
				120V	208V	240V	277V
C-VT-A-LVT4-S5L-SCCT-UL-GR	Wide	Up to 5200 Lumens	Up to 40W	0.367	0.21	0.18	0.16

WARRANTY AND CERTIFICATIONS

WARRANTY	cETLus LISTED	DLC
5-Year Warranty*	Wet Locations	Standard

© 2022 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cETLus Listed Intertek logo is a trademark of Intertek Testing Services NA, Inc. The DLC QPL logo and the DLC QPL Premium logo are registered trademarks of Northeast Efficiency Partnerships, Inc.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 06/21/2022

For informational purposes only. Content is subject to change. *See creelighting.com/resources/warranties

C-LITE
LED LIGHTING