


## Remote for sensor PH12568

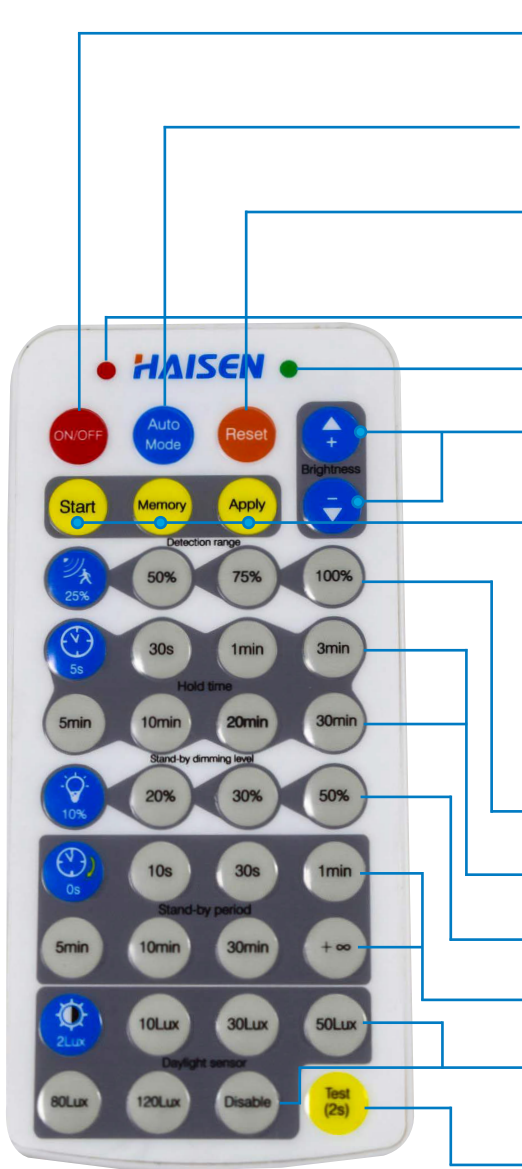

### ON/OFF

"ON/OFF" key only functions as a switch. Fixture will remain at last known state. If light is turned off, then power is cycled, the fixture will remain OFF until the ON/OFF button is pressed again.

### Auto Mode

Press "Auto Mode" button, the sensor starts to work and all settings remain the same before the light gets switched on/off.

### Reset

Press the "RESET" button to return sensor to factory defaults.

Light will flicker after any button is pressed

Light will flicker after "Apply" button is pressed

### +/-

1. To adjust brightness 10-100% in on/off mode.
2. To adjust highest brightness 60-100% in sensor mode.

### Start

Press "Start" to customize scene, users can change detection range, daylight threshold, holdtime, standby dimming level and standby period.

### Memory

Press "Memory" to save all the settings. Settings will be saved until they are overridden with new settings.

### Apply

Pressing "APPLY" without first saving the settings to memory will cause the setting to be available for a one time use. Settings should be done within 30S, otherwise it exits memory mode.



**DETECTION AREA:** Press to define detection area (100%/75%/52%/25%)



**HOLD TIME:** Press to define hold time (5s/30s/1min/3min/5min/10min/20min/30min)



**STAND-BY DIMMING LEVEL:** Press to define stand-by dimming level (10%/20%/30%/50%)



**STAND-BY PERIOD:** Press to define stand-by period (0s/10s/30s/1min/5min/10min/30min/+∞)  
Note: "0s" means no stand-by period, "+∞" means unlimited stand-by period.



**DAYLIGHT THRESHOLD:** Press to define daylight level (2Lux/10Lux/30Lux/50Lux/80Lux/120Lux/Disable)  
Note: Disable means light will be turned on once sensor detects movement, regardless of the ambient lux.

### Test (2s)

The button "Test (2s)" is for testing purpose after commissioning. Pressing this button, the sensor goes to test mode (hold time is only 2s).

## Instructions

---

### Memory & Apply Mode

1. Press ON/OFF button to turn on the light or off.
2. To reset the parameters, follow the below steps:

Step 1 - Press ON to turn on the light if it was off at the start.

Step 2 - Press START to begin programming the sensor.

Step 3 - Press the button of Detection Range, Hold Time, Stand-by Dimming Level, Stand-by Period and Daylight Threshold one after the other in sequence.

Step 5 - Press MEMORY to save the settings.

**Note: The interval of each parameter setting shall be controlled within 30s.**

3. To program other lights in the array that have similar sensors to the same program.

Step 1 - Press ON to the second sensor.

Step 2 - Press APPLY.

### Isolated Setting Mode

1. Press ON/OFF button to turn on the light or off. Press AUTO MODE, the remote will activate settings that were saved last or remain at the factory default settings.

2. To reset the parameters, follow the below steps:

Step 1 - Press ON to turn on the light if it was off at the start.

Step 2 - Press any button of AUTO MODE, RESET, TEST, or APPLY to begin the sensor detection mode.

Step 3 - Press the button of DETECTION RANGE, HOLD TIME, STAND-BY DIMMING LEVEL, STAND-BY PERIOD and DAYLIGHT THRESHOLD one after the other in sequence.

### Notes:

1. Settings will be saved automatically and remain until you press reset again.
2. Light will flicker when setting each parameter.