



Before You Begin

Read These Instructions Completely and Carefully



Upgrade Instructions

STEP 1: Disconnect power from the luminaire and follow proper lockout/tagout procedures before beginning installation or maintenance.

STEP 2: Remove the existing luminaire. Dispose of the lamp(s) and ballast(s) per local requirements.

STEP 3: Each fixture is supplied with a carabiner (1). Place the carabiner through the eyelet of the eyebolt (2) on top of the fixture.

STEP 4: Attach the carabiner to a secure structure.

STEP 5: Connect the fixture input leads to the supply wire leads.


STEP 6: Each fixture is supplied with 1-10V DC dimming leads.

- If dimming is not needed, nothing needs to be done.


NOTE: Do **NOT** connect the dimming leads together. This will cause the fixture to not operate as desired.

- If dimming is desired:
 - a. Connect the “+” supply lead to the “+” connection lead on the fixture.
 - b. Connect the “-” supply lead to the “-” connection lead on the fixture.

NOTE: The polarity of the dimming leads is important. Improper connection will cause the fixture to not operate as desired.

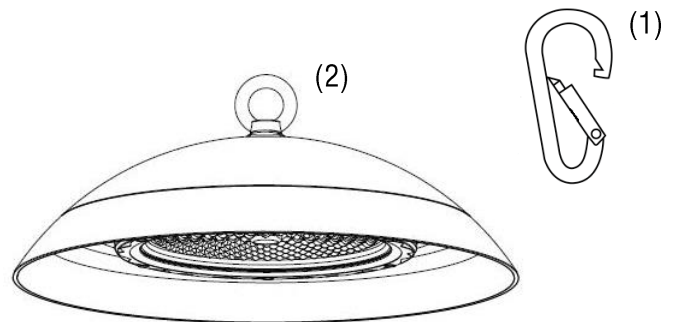

⚡ Wiring Diagram

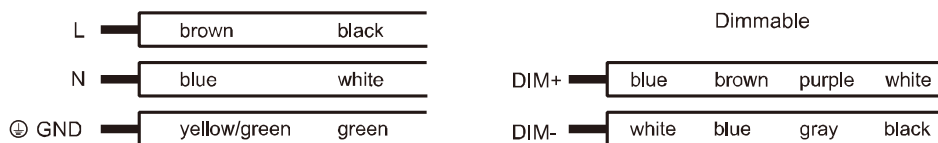

STEP 7: Power can now be restored to the fixture.

WARNING

Risk of fire and electric shock

- Disconnect power from the luminaire and follow proper lockout/tagout procedures before beginning installation or maintenance. Contact a qualified electrician for installation.
- *Venture Lighting's* LED Highbay Fixture installation requires knowledge of luminaire electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in a wiring enclosure or electrical component during installation.
- Do not dismantle the fixture without Venture Lighting's approval.
- If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.

CAUTION

- IP69K rated.
- *Venture Lighting's* LED Highbay Fixture must be operated within an ambient fixture temperature range of -40° to 50°C.

(877) 281-1233

Fax: (877) 294-2829

2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA

E-mail: venture@adlt.com

VentureLighting.com



AVERTISSEMENT

Risque d'incendie et de choc électrique

- Débranchez l'alimentation du luminaire et suivez les procédures de verrouillage / étiquette appropriées avant de commencer l'installation ou la maintenance. Contactez un électricien qualifié pour l'installation.
- Venture Lighting L'installation LED High Bay Fixture requiert la connaissance des systèmes électriques des luminaires. Si ce ^L n'est pas qualifié, n'essayez pas d'installer. Contactez un électricien qualifié.
- Pour éviter les dommages causés par le câblage ou l'abrasion, ne pas exposer le câblage aux arêtes de la tôle ou à d'autres ^L objets tranchants.
- Ne faites pas ou ne modifiez aucun trou ouvert dans une enceinte de câblage ou un composant électrique pendant l'installation.
- Ne démontez pas l'appareil sans l'approbation de Venture Lighting.
- Si le câble ou cordon flexible externe de la luminaires est endommagé, il ne doit être remplacé que par le fournisseur, un agent de service ou une personne qualifiée.

MISE EN GARDE

- Évalué pour IP69K.
- Venture Lighting's LED High Bay Fixture doit être utilisé dans une plage de température ambiante de -40° à 50°C.

(877) 281-1233

Fax: (877) 294-2829

2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA

E-mail: venture@adlt.com

VentureLighting.com

