



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Replaces MH or HPS up to 175W*
- Replaces CFL up to 85W*
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs
- **Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 9.3" x 9.3" x 17.4".*

Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- Garage lighting
- General illumination

Notes

- The use of an external surge protection device is recommended.
- Operating temp. range between -40°F and 122°F (-40°C and 50°C).
- Suitable for use in dry and damp environments.
- Suitable for use in portable, surface mounted and ceiling luminaires.
- Suitable for use in open and enclosed luminaires with minimum lamp compartment dimensions of 9.3" x 9.3" x 17.4"
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses

Model# OR036B39D-5000K

Product Performance

Input Power (W)	36
Initial Lumens	5000
Lumens/Watt (Bare Lamp)	140
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	80
Life Hours	50000
Dimming	No
Operating Temperature Range	-40°F to 122°F (-40°C to 50°C)

Physical Characteristics

Base Type	Mogul, (EX39)
Overall Length A	10.16" (258mm)
Diameter B	3.66" (93mm)
Minimum Compartment Size	9.3" x 9.3" x 17.4"
Weight	1.8 lbs (816 g)

Electrical Characteristics

Input Voltage Range	100V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

Regulatory Qualifications

cULus Listed

cULus Classified – Certified to UL 1598C



DLC® Qualified - Model# OR036B39D-5000K

Accessories

SP12714 – 120-277V Surge Protector



Venture 36W LED Retrofit Lamp

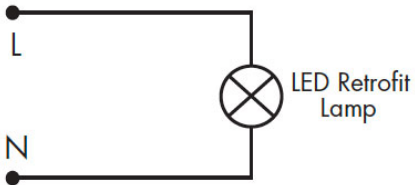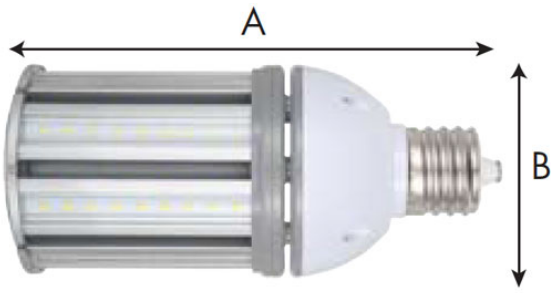

Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606
Fax: (800) 451-2605
7905 Cochran Rd, Suite 300
Glenwillow, Ohio 44139
E-mail: Venture_Lighting@VentureLighting.com
VentureLighting.com

