

**DLC® Model# FC4-20NA**

**Description**

VFLOOD is a low profile, lightweight LED Flood Light fixture, designed for long life and low maintenance. The fixtures are designed to quickly and easily upgrade existing flood fixtures.

**Construction**

The housing unit is constructed from heavy-duty, die cast aluminum. Fixtures are finished with a durable bronze polyester powder coating. To ensure weather-tight protection and to keep out contaminants, each optical assembly is sealed with a gasket. Each unit is rated for wet locations.

**Electrical**

The power supply has a range of 120-277V, 50/60 Hz. The high performance LED fixtures are rated up to 50,000 hours. These fixtures are not dimmable.

**Mounting**

Fixture come standard with w knuckle mount with a 1/2" NPS nipple. An accessory U-Bracket can also be purchased separately for yoke applications.

**Product Performance**

Wattage	20W
Lumens	2250
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	75+
Lumen Maintenance @50,000 hours*	90%
Calculated L70 @ 25°C Ambient in Hours*	163,000
Replaces HID Wattage	70-100W
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

**Physical Characteristics**

Fixture Color	Bronze
Length	4.13"
Weight	3.8 lbs
Width	6.69"
Height	4.72"

**Electrical Characteristics**

Amperage Draw (Input Volts/Amps)	120/0.20 208/0.12 240/0.10 277/0.09
Surge Protection	10kA

**Regulatory Qualifications**

ETL Listed

DLC® Premium Qualified - Model# FC4-20NA

Rated for wet locations

**Accessories**

KT56256 U-BRKT ACCESSORY KIT 20W-50W ROUND BACK FLOOD



SP12714 - 120-277V Surge Protector

**Notes:**

\*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21



# Venture VFLOOD - 20W LED Flood Light

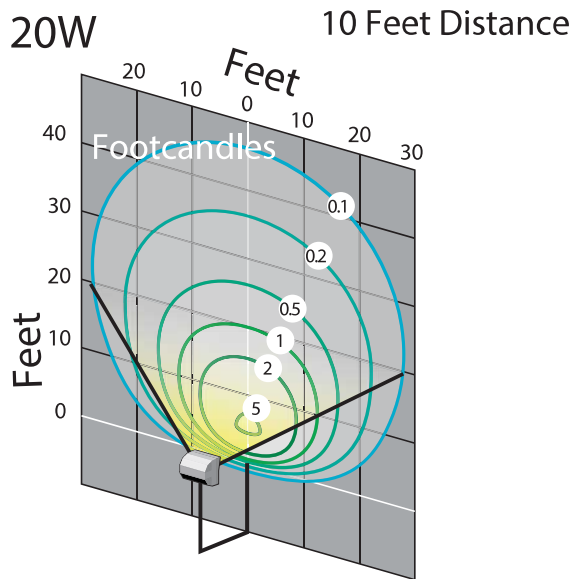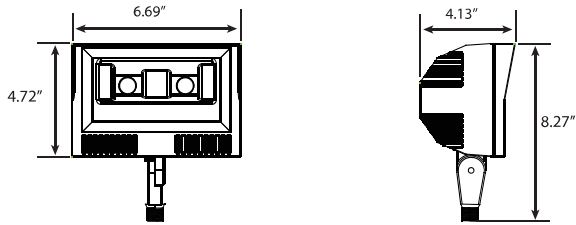

(800) 451-2606  
Fax: (800) 451-2605  
7905 Cochran Rd, Suite 300  
Glenwillow, Ohio 44139  
E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)  
[VentureLighting.com](http://VentureLighting.com)

