

Model# HR-54T5A2-E39AK-4K


**Description**

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

**Features & Benefits**

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Horizontal burn position
- Easy installation
- Reduced maintenance costs
- *\*Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 4.9" diameter by 10" long.*

**Applications**

- Area Lighting
- Flood lighting

**Notes**

- The use of an external surge protection device is recommended. Operating temperature range between -4°F and 113°F (-20°C and 45°C). Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamp base rotates up to 270° to allow for proper aiming of the lamp.

**Product Performance**

Input Power (W)	54
Bare Lamp Lumens	6500
DLC Rated Lumens	5010
Lumens/Watt (Bare Lamp)	120
Orientation	Horizontal
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	70
Life Hours	50000
Distribution	Type V
Dimming	No
Operating Temperature Range	-4°F to 113°F (-20°C to 45°C)

**Physical Characteristics**

Base Type	Mogul, (E39)
Overall Length A	9.56" (243mm)
Diameter B	4.45" (113mm)
Weight	2.78 lbs (1260g)

**Electrical Characteristics**

Input Voltage Range	120V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

**Regulatory Qualifications**

cULus Listed

cULus Classified (per UL 1598C)



Model# HR-54T5A2-E39AK-4K

**Accessories**


SP12714 – 120-277V Surge Protector



# Venture 54W LED Retrofit Lamp w/ Type V Distribution

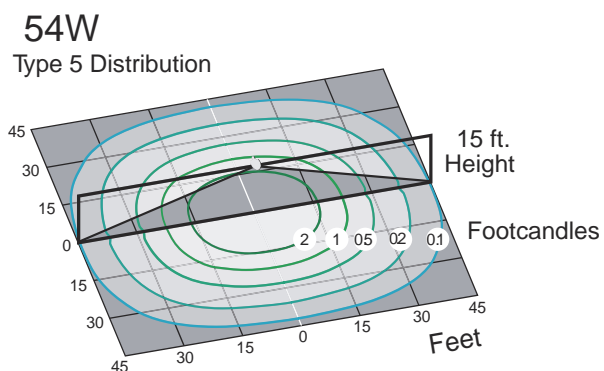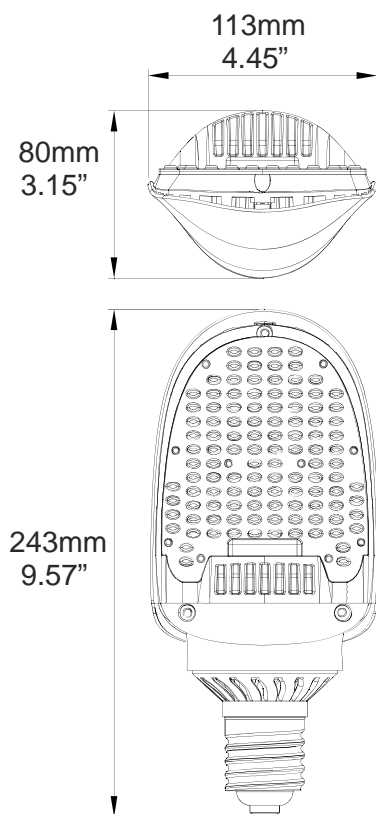

Note: data shown is for the bare lamp only

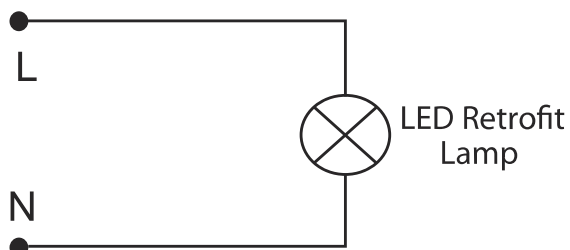

Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606  
Fax: (800) 451-2605  
7905 Cochran Rd, Suite 300  
Glenwillow, Ohio 44139  
E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)  
[VentureLighting.com](http://VentureLighting.com)

