



LED Fixture Battery Back-up

Order Code: BB23500




Description

The LED battery back-up system is compatible with Venture Lighting's LED fixtures and kits. In the event of a power failure, the LED battery back-up system switches on and will operate the fixture for 90 minutes. The LED battery back-up system contains a self-contained battery, charger, and converter circuit.

This driver will operate the following LED modules: Any LED module designed to accept constant input current of 200-400mA and that has a forward input voltage range of 20-50Vdc.

Dimensions

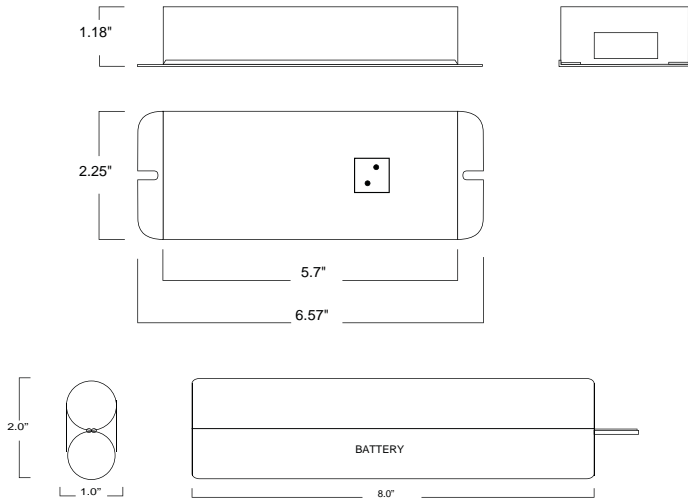

Emergency LED Driver Listed for Factory Installation

Specifications

Input Voltage	120-277VAC, 50/60Hz
Input Current	60mA Max.
Input Power	4.0W Max
Output Current	200-400mA
Output Voltage Range	30-50Vdc
Output Power / Lumens	10.0W
Battery Type/ Model Number	Ni-Cd
Battery Capacity Available	26.0WH
Recharge Time	24 Hours
Number of Output Channels	1
Output Type	Class 2
Ambient Operating Temperature Range	0°C to 50°C
Service Life	7-10 years

Physical Characteristics

Color	Red
Length	6.57"
Width	2.25"
Height	1.18"

Regulatory Qualifications

ULus Class 2; Damp Locations

Wiring Diagram

