



Before You Begin

READ THESE INSTRUCTIONS COMPLETELY AND CAREFULLY



UNPACKING

- Unpack and carefully examine the product.
- Report any damage and save all packing materials if any part(s) were damaged during shipping.
- Do not attempt to install or use this equipment if it is damaged.

INCLUDED IN THIS BOX

- LED Wallpack Fixture
- Gasket
- Installation instructions.

WARNING – RISK OF FIRE, ELECTRIC SHOCK, INJURY, OR PROPERTY DAMAGE

- Failure to follow these instructions or altering equipment could result in injury or damage and void warranty. Venture assumes no liability for injury, damages or losses of any kind that may arise from the improper, careless, or negligent installation, handling or use of this product.
- This equipment must be installed and serviced per applicable codes and ordinances by qualified personnel (ex. licensed electrician) familiar with the operation of the product and any hazards involved.
- Disconnect power to the equipment and allow to cool before installing or servicing.
- Handle sharp edges with care. To prevent wiring damage, do not expose wiring to sharp edges.
- Verify that all electrical connections have been properly made and the fixture is grounded to avoid potential electrical shocks.
- It is the installers responsibility to confirm the proper input voltage is used with this equipment.
- Do not handle energized equipment when hands are wet, when standing on wet surfaces, or in water.
- This fixture must be mounted securely to a ceiling or structure to support the weight.

SUPPLIER'S DECLARATION OF CONFORMITY (SDoC)

- This equipment complies with the limits for a Class A digital device, pursuant to Part 15 Subpart B of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial, industrial or business environment.

For warranty information refer to <https://www.venturelighting.com/resources/warranties.html>.

IMPORTANT SAFETY INFORMATION

- Operating temperature: -40°C to +40°C (-40°F to +104°F).
- Suitable for use in wet locations.
- All wiring and connectors used with this equipment shall be rated a minimum of 90°C (194°F).

Installation Instructions

- 1: Disconnect power from the luminaire and follow proper lockout/tagout procedures before beginning installation or maintenance.
- 2: Remove the existing luminaire (if present) and dispose of per local requirements.
- 3: Loosen the screws on the side of the fixture to gain access to driver compartment. (Figure 1)
- 4: Open the fixture and disconnect the quick disconnect which connects the LED driver to LED module. (Figure 2)
- 5: Drill mounting installation holes needed for the installation into the back of the fixture. (Figure 3)
- 6: Attach supplied gasket to back of fixture.
- 7: Loosen the plug on the back of the fixture, route the wiring through the hole and mount the back of the fixture to the junction box. (Figure 4)
- 8: Connect the supply wires to the fixture input wiring as shown in wiring diagram below.
NOTE: The correct polarity of the dimming connections is essential to proper operation.
NOTE: If dimming is required, remove gray and purple wires from wattage selector switch by loosening the screws and wire to external dimming leads. **DO NOT** connect the Driver Dim(+) (purple) to the Driver Dim(-) (gray) wire as the fixture will not operate correctly. Insulate 12V+ (Red) wire if not used.
- 9: Use selector switch to choose CCT setting (3000K / 4000K / 5000K). (Figure 5)
- 10: Use rotary switch to choose wattage setting. (Figure 6)
- 11: Photocell is enabled standard on this fixture. If the photocell is not needed, disconnect the connector from the photocell on right side knockout. (Pink and Black wires)
- 12: Connect the quick connect terminals which were removed in Step 4.
- 13: Close fixture and secure by tightening the screws on the side of the fixture. (Figure 1)
NOTE: Ensure rubber gasket is properly placed to prevent water from entering fixture.
- 14: Power can now be restored to the system.





Figure 1



Quick Connector

Figure 2




Figure 3




Figure 4




Figure 5





Figure 6

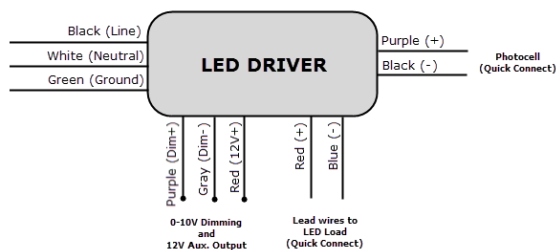

Wiring Diagram

(800) 451-2606

7905 Cochran Road, Suite 300

Glenwillow, Ohio 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

