



overview


Venture Lighting's outdoor, wet-rated motion sensor utilizes Passive Infrared (PIR) detection technology into a line voltage motion sensor. Designed to mount directly through a 1/2" knockout (7/8" hole) in a light fixture or pole, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment.

lenses

Lenses Included: High Mount 360 (installed) & Aisleway

INSTALLATION INSTRUCTIONS

- Sensor has a 1/2" chase nipple that enables mounting through a knockout/hole in a junction box, fixture, or pole.
- When mounting to a pole, a 7/8" unthreaded hole should be located 12" below luminaire and should be accessible via an adjacent or opposite side hand hole.

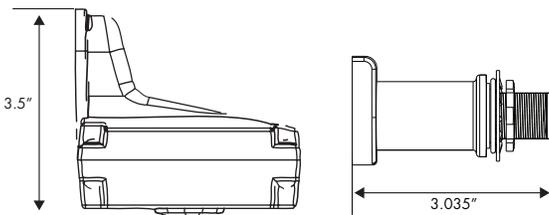

features

- 100% Digital PIR Detection, Excellent RF Immunity
- Up to 45 ft Mounting
- IP66 Rated for Outdoor Applications
- Self-Contained Relay, No Power Pack Needed
- No Minimum Load Requirements
- Compatible w/ LEDs, Electronic & Magnetic Ballasts, CFLs & Incandescents
- Interchangeable Hot & Load Wires - Impossible to Wire Backwards
- Adjustable Time Delays, Max/Min Dim Levels & Ramp Rates
- Programming Button Accessible without Opening Sensor or Removing Gaskets
- No Field Calibration or Sensitivity Adjustments Required
- Non-Volatile Setting Memory
- Convenient Test Mode

specifications

Size (w/ Mounting Flange): 3.5"H x 2.50"W x 4.00"D
(9.5cm x 6.4cm x 10.2cm)

Weight: 9.6 oz

Mounting: 1/2" knockout (7/8" hole) on fixture

Maximum Load: 800W @ 120 VAC; 1200W @ 277 VAC;
1000W @ 208 VAC; 1200W @ 240 VAC

Motor Load: 1/4 HP

Dimming Load: Sinks <20 mA; (~40 LED drivers/ballasts @ 0.5 per)

Ambient Temperature, Standard: -14-160°F (-10 to 71°C)

Relative Humidity, Standard: 20 to 75% non-condensing

RoHS Compliant: Yes


Order Code	Description	Voltage Range	Product Color
PH58143	Wet Rated Motion Only Control Sensor - Long Extension	120-277V	White
PH52171	Wet Rated Motion/Photocell/Dimming Control Sensor - Long Extension	120-277V	White



Motion-Photocell-Dimming Control

SITE AND AREA LIGHTING/ HIGH MOUNT APPLICATIONS


Venture Lighting's outdoor, wet-rated motion sensor is intended for higher pole mount applications, between 15-30 ft (4.57-9.14 m), and provides a coverage area radius for walking motion of 15-20 ft (4.57-6.10 m). When mounted to a pole the sensor provides 270° of coverage (90° is blocked by the pole).

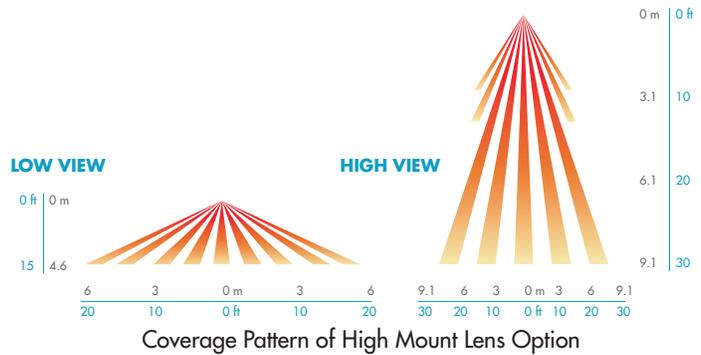

WIRING (DO NOT WIRE HOT)

WIRING TO SINGLE PHASE POWER (120/277/347 VAC)


- BLACK*** - 120/277 VAC Input
- RED** (wire for 347 VAC - requires HVOLT option)
- BLACK*** - Switched Line Voltage Output to Luminaire
- RED** (wire for 347 VAC - requires HVOLT option)
- WHITE** - Neutral
- VIOLET (w/ D option)** - Low Voltage Dim Output (0-10 VDC)
- GRAY (w/ D option)** - Low Voltage Common

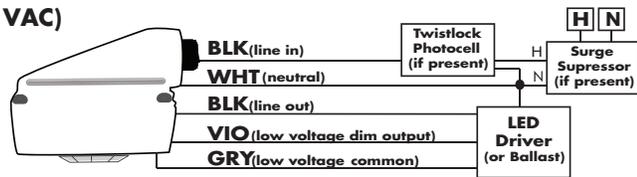

*BLACK wires can be reversed

WIRING TO 2-PHASE POWER (208/240/480 VAC)*

- BLACK*** - 208/240 VAC Phase A Input
- RED** (wire for 480 VAC - requires HVOLT option)
- BLACK*** - Switched Line Voltage Output to Luminaire
- RED** (wire for 480 VAC - requires HVOLT option)
- WHITE** - Phase B of 208/240/480 VAC Input
- VIOLET (w/ D option)** - Low Voltage Dim Output (0-10 VDC)
- GRAY (w/ D option)** - Low Voltage Common

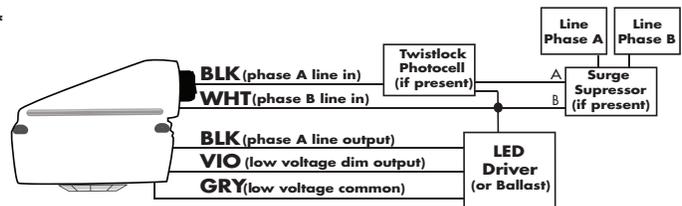

*BLACK wires can be reversed

*Safety Note: only one line phase is being switched



(800) 451-2606

6675 Parkland Blvd., Suite 100

Solon, OH 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com



VENTURE
LIGHTING