

Model# HR-115T5A-E39AK-5K


Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Horizontal burn position
- Easy installation
- Reduced maintenance costs
- **Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 5.9" diameter by 12.6" long.*

Applications

- Area Lighting
- Flood lighting

Notes

- The use of an external surge protection device is recommended. Operating temperature range between -4°F and 113°F (-20°C and 45°C). Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamp base rotates up to 270° to allow for proper aiming of the lamp.

Product Performance

| | |
|------------------------------------|-------------------------------|
| Input Power (W) | 115 |
| Bare Lamp Lumens | 13500 |
| DLC Rated Lumens | 10860 |
| Lumens/Watt (Bare Lamp) | 117 |
| Orientation | Horizontal |
| Correlated Color Temperature (CCT) | 5000K |
| Color Rendering Index (CRI) | 70 |
| Life Hours | 50000 |
| Distribution | Type V |
| Dimming | No |
| Operating Temperature Range | -4°F to 113°F (-20°C to 45°C) |

Physical Characteristics

| | |
|------------------|-----------------|
| Base Type | Mogul, (E39) |
| Overall Length A | 11.69" (297mm) |
| Diameter B | 5.43" (138mm) |
| Weight | 2.8 lbs (1280g) |

Electrical Characteristics

| | |
|---------------------|----------------------|
| Input Voltage Range | 120V-277V; 50/60Hz |
| Driver | Internal within lamp |
| Power Factor | >0.90 |
| THD | <20% |

Regulatory Qualifications

cULus Listed

cULus Classified (per UL 1598C)



Model# HR-115T5A-E39AK-5K

Accessories


SP12714 – 120-277V Surge Protector



Venture 115W LED Retrofit Lamp w/ Type V Distribution

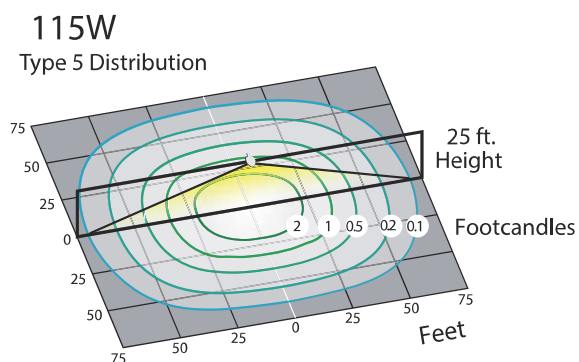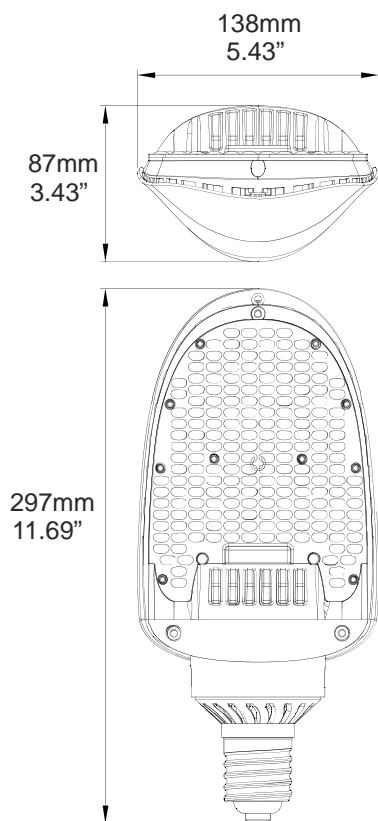

Note: data shown is for the bare lamp only

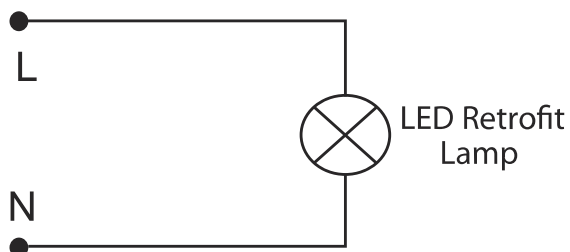

Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606
Fax: (800) 451-2605
7905 Cochran Rd, Suite 300
Glenwillow, Ohio 44139
E-mail: Venture_Lighting@VentureLighting.com
VentureLighting.com

