

Selectable LED Directional Retrofit Lamp Order Code: LP27189



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Feature & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Horizontal burn position
- Easy installation
- Reduced maintenance costs

Applications

- Area lighting
- Flood lighting

Notes

- The use of an external surge protection device is recommended
- Operating temp. range between -4°F and 113°F (-20°C and 45°C)
- Suitable for use in dry and damp environments
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire
- Lamp base rotates up to 270° to allow for proper aiming of the lamp

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

Product Performance Wattage	Lumens
54W	5886
45W	4905
36W	3924
Lumens/Watt (Bare Lamp)	109
Orientation	Horizonta
Correlated Color Temperature (CCT)	50001
Color Rendering Index (CRI)	<u>></u> 80
Life Hours	50000
Distribution	Туре \
Min. Lamp Compartment (H x L x W)	16.5" x 8.25" x 8.25 (420mm x 210mm x 210mm)
Dimming	Yes (Switch
Operating Temperature Range	-4°F to 113°F (-20°C to 45°C)
Physical Characteristics	
Base Type	Mogul (EX39)
Overall Length A	9.64" (245mm)
Diameter B	4.45" (113mm)
Weight	1.65 lbs. (748g
Electrical Characteristics	
Input Voltage Range	120-277V; 50/60H
Driver	Internal within lamp
Power Factor	<u>></u> 0.90
THD	<u><</u> 20%
Regulatory Qualifications	
clllus Listed (III 1993/CSA C22 2 No. 1993)	

cULus Listed (UL 1993/CSA C22.2 No. 1993)


Accessories


SP12714 120-277V Surge Protector

CE001X04RO – EX39 Lamp Socket

Revision: 07, 16-Jan 2024


Venture Selectable LED Retrofit Lamp with Type V Distribution

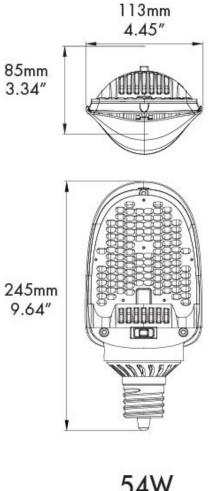



Note: data shown is for the bare lamp only





Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606

6675 Parkland Blvd., Suite 100 Solon, Ohio 44139 USA Email: Venture_Lighting@VentureLighting.com VentureLighting.com

