

Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Feature & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Horizontal burn position
- Easy installation
- Reduced maintenance costs

Applications

- Area lighting
- Flood lighting

Notes

- The use of an external surge protection device is recommended
- Operating temp. range between -4°F and 113°F (-20°C and 45°C)
- Suitable for use in dry and damp environments
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire
- Lamp base rotates up to 270° to allow for proper aiming of the lamp

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

Product Performance

Input Power (W)	115
Bare Lamp Lumens	13500
DLC Rated Lumens	10640
Lumens/Watt (Bare Lamp)	117
Orientation	Horizontal
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	70
Life Hours	50000
Distribution	Type V
Min. Lamp Compartment (H x L x W)	12.6" x 5.9" x 5.9" (320mm x 150mm x 150mm)
Dimming	No
Operating Temperature Range	-4°F to 113°F (-20°C to 45°C)

Physical Characteristics

Base Type	Mogul (E39)
Overall Length A	11.69" (297mm)
Diameter B	5.43" (138mm)
Weight	2.8 lbs (1280g)

Electrical Characteristics

Input Voltage Range	120-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	> 0.90
THD	< 20%

Regulatory Qualifications

cULus Listed (UL 1993/CSA C22.2 No. 1993)


cULus Classified (UL 1598C/CSA C22.2 No. 250.1)

Accessories

SP12714 120-277V Surge Protector


Revision: 08, 12-March 2024

Venture 115W LED Retrofit Lamp with Type V Distribution

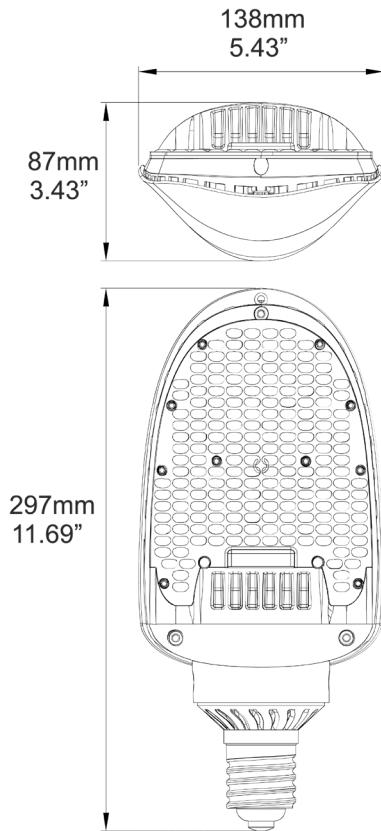


115W

Type V Distribution

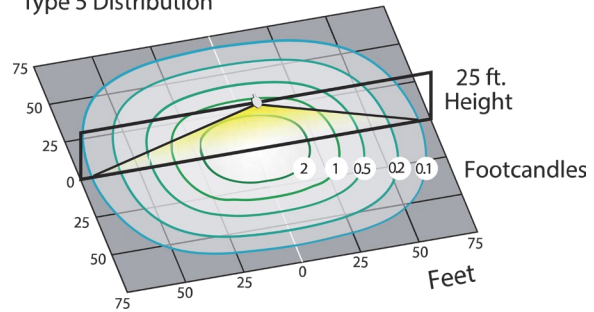

Note: data shown is for the bare lamp only

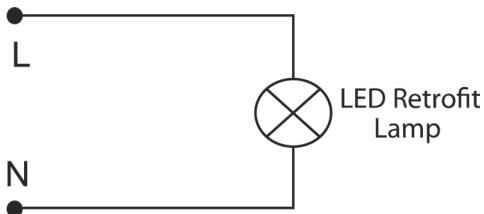

Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606

6675 Parkland Blvd., Suite 100

Solon, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

