



## Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

## Feature & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Horizontal burn position
- Easy installation
- Reduced maintenance costs

## Applications

- Area lighting
- Flood lighting

## Notes

- The use of an external surge protection device is recommended
- Operating temp. range between -4°F and 113°F (-20°C and 45°C)
- Suitable for use in dry and damp environments
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire
- Lamp base rotates up to 270° to allow for proper aiming of the lamp

## Warranty

For warranty information refer to: [www.venturelighting.com/resources/warranties](http://www.venturelighting.com/resources/warranties)

## Product Performance

Wattage	Lumens	
115W	12305	
95W	10165	
75W	8025	
Lumens/Watt (Bare Lamp)		107
Orientation		Horizontal
Correlated Color Temperature (CCT)		5000K
Color Rendering Index (CRI)		≥80
Life Hours		50000
Distribution		Type V
Min. Lamp Compartment (H x L x W)		17.3" x 10.2" x 10.2" (440mm x 260mm x 260mm)
Dimming		Yes (Switch)
Operating Temperature Range		-4°F to 113°F (-20°C to 45°C)

## Physical Characteristics

Base Type	Mogul (EX39)
Overall Length A	11.81" (300mm)
Diameter B	5.43" (138mm)
Weight	2.65 lbs. (1202g)

## Electrical Characteristics

Input Voltage Range	120-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	≥ 0.90
THD	≤ 20%

## Regulatory Qualifications



cULus Listed (UL 1993/CSA C22.2 No. 1993)

## Accessories


SP12714 120-277V Surge Protector

CE001X04RO – EX39 Lamp Socket


# Venture Selectable LED Retrofit Lamp with Type V Distribution

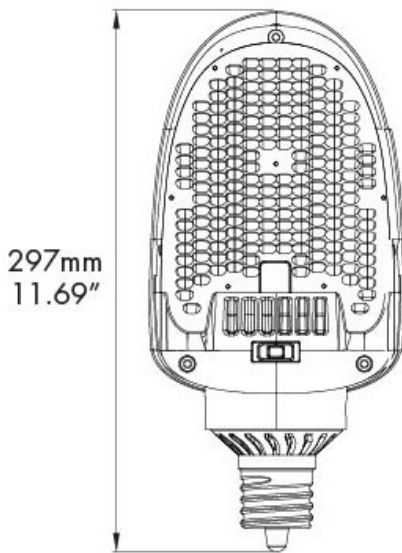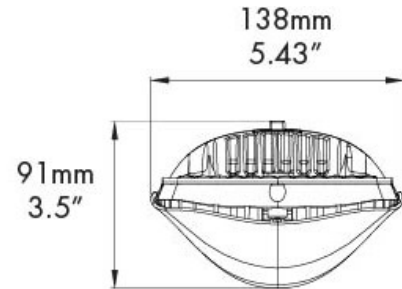

Type 5 Distribution

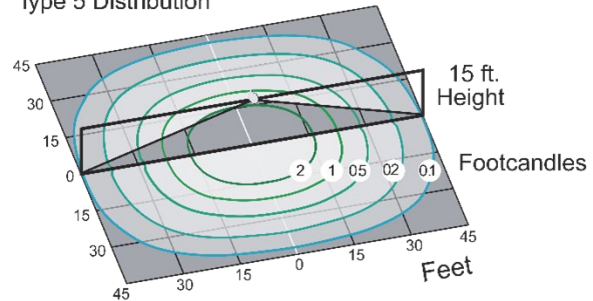

Note: data shown is for the bare lamp only

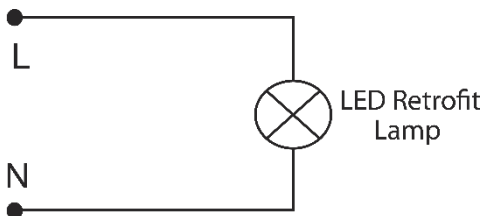

Easy to install - bypass ballast and provide voltage directly to lamp

**(800) 451-2606**

6675 Parkland Blvd., Suite 100

Solon, Ohio 44139 USA

Email: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

**VentureLighting.com**

