



Description

Venture Lighting's LED Volumetric troffers are durable, long lasting, high quality, low maintenance lighting fixtures. Each are designed to be quick and easy upgrades to existing fluorescent fixtures.

Construction

The housing unit is constructed from heavy-duty aluminum. Fixtures are finished with a durable white polyester powder coating.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. 0-10V dimming is standard. Rated for dry and damp locations.

Mounting

The fixture is designed for replacing fluorescent fixtures in T-grid drop ceiling applications.

DLC® Model# TB22-25N8AD-02

Product Performance

Wattage	25W
Lumens	3125
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Life Hours	50000
Replaces Fluorescent Troffer	2x2
Operating Temperature Range	-13°F to 113°F (-25°C to 45°C)

Physical Characteristics

Fixture Color	White
Length	23.7"
Weight	8.4 lbs
Width	23.7"
Height	3.7"

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.23 208/0.14 240/0.12 277/0.10
----------------------------------	-------------------------------------

Regulatory Qualifications

cULus Listed, IC-Rated, Rated for dry and damp locations

DLC Model# TB22-25N8AD-02

Accessories

BB24624 – LED Fixture Battery Back-up

For a factory installed Battery Backup add "-EM" after order code (Lumens: 2530) - Temp Range: (0-50°C)†

LN17209 Replacement lens 2x2 Volumetric troffer

AC25420 - 3/8" 3-WIRE 14/3 600V MAX 6FT FLEX. WHIP


Add suffix "-WP" to order code for a factory installed fixture with a 6ft whip (Part # AC25420)

Add suffix "-PP" to order code for a factory installed fixture with PowPack.

†Operating temperature range for Battery Backup



Venture 2x2 Volumetric Troffer

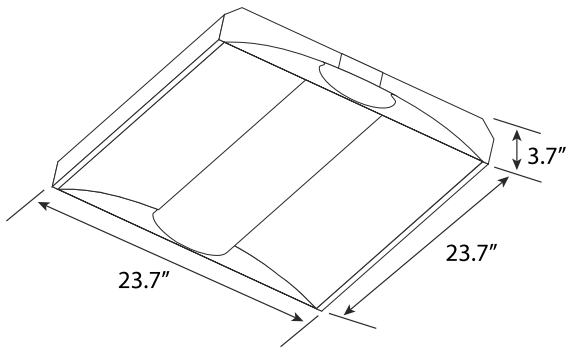

(800) 451-2606
Fax: (800) 451-2605
7905 Cochran Rd, Suite 300
Glenwillow, Ohio 44139
E-mail: Venture_Lighting@VentureLighting.com
VentureLighting.com

