



Description

Venture Lighting's Wallpack luminaires are low profile, light weight, and designed for long life with low maintenance and great performance. These LED luminaires are designed to quickly and easily upgrade existing HID wall pack fixtures.

Construction

Rugged die cast housing finished in a durable powder coat finish and with polycarbonate lens. The high performance LED sources are mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency. The fixture has a gasket sealed to eliminate the threat of contaminants damaging the components. The standard fixture color is bronze, custom colors available upon request.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. The luminaires are IP65 rated, suitable for wet locations. Button photocell accessory can easily be mounted into the fixture. Fixture is not dimmable.

Mounting

Fixture can easily be wall mounted to a recessed junction box or be wall mounted and accept a 1/2" NPT surface mounted conduit. The 60W Venture LED traditional style wallpack has the same footprint as HID 150W/175W wallpacks.

DLC® Model# WH3-60AA-50

Product Performance

| | |
|------------------------------------|--------------------------------|
| Wattage | 60W |
| Lumens | 7260 |
| Correlated Color Temperature (CCT) | 5000K |
| Color Rendering Index (CRI) | 80 |
| Lumen Maintenance @50,000 hours* | 81% |
| Life Hours | 89000 |
| Replaces HID Wattage | 175W |
| Operating Temperature Range | -40°F to 104°F (-40°C to 40°C) |

Physical Characteristics

| | |
|---------------|--------|
| Fixture Color | Bronze |
| Length | 9.92" |
| Weight | 10 lbs |
| Width | 14.2" |
| Height | 9.25" |

Electrical Characteristics

| | |
|----------------------------------|-------------------------------------|
| Amperage Draw (Input Volts/Amps) | 120/0.51 208/0.30 240/0.26 277/0.23 |
|----------------------------------|-------------------------------------|

Regulatory Qualifications

cULus Listed

DLC® Premium Qualified - Model# WH3-60AA-50

IP65, suitable for wet location

Accessories

SP12714 – 120-277V Surge Protector

PH56903 - Button Photocell (120-277V)

Add suffix "-P" to order code for a factory installed fixture with a Button Photocell (part # PH56903).



For a Factory installed Battery Backup add "-EM" after code (Lumens 1932) – Temp range for battery up is (0-50°C)

Notes:

*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21



Venture 60W LED Traditional Style Wallpack

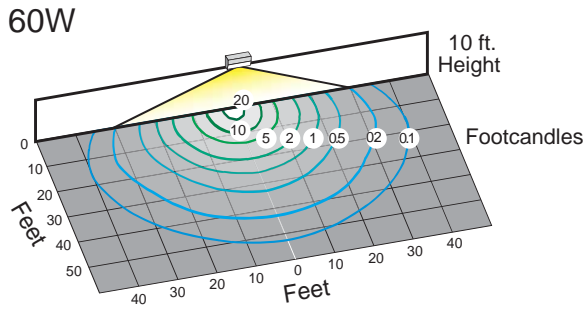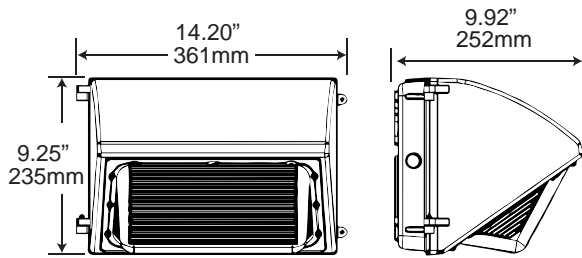

(800) 451-2606
Fax: (800) 451-2605
7905 Cochran Rd, Suite 300
Glenwillow, Ohio 44139
E-mail: Venture_Lighting@VentureLighting.com
VentureLighting.com

