



Description

Venture Lighting's Wallpack luminaires are low profile, light weight, and designed for long life with low maintenance and great performance. These LED luminaires are designed to quickly and easily upgrade existing HID wall pack fixtures.

Construction

Rugged die cast housing finished in a durable powder coat finish and with polycarbonate lens. The high performance LED sources are mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency. The fixture has a gasket sealed to eliminate the threat of contaminants damaging the components. The standard fixture color is bronze, custom colors available upon request.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. 0-10V dimming capability is standard. The luminaires are IP65 rated, suitable for wet locations. Button photocell accessory can easily be mounted into the fixture.

Mounting

Fixture can easily be wall mounted to a recessed junction box or be wall mounted and accept a 1/2" NPT surface mounted conduit.

DLC Model# WH4-120NACT4[S, (blank)][P, (blank)]

Product Performance

Wattage	120W
Lumen Output	14670
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	70
Lumen Maintenance @50,000 hours*	95%
Life Hours	372000
Replaces HID Wattage	400W
Operating Temperature Range	-40°F to 113°F (-40°C to 40°C)

Physical Characteristics

Fixture Color	Bronze
Weight	10.6 lbs
Width	14.2"
Length	9.7"
Height	9.3"

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/1.1 208/0.59 240/0.51 277/0.45
----------------------------------	------------------------------------

Regulatory Qualifications

cULus Listed

DLC Qualified - Model# WH4-120NACT4[S, (blank)][P, (blank)]

IP65, suitable for wet location

Accessories

SP12714 - Surge Protector (120-277V)



PH56903 - Button Photocell (120-277V)

Notes:


*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11



Venture 120W Full Cutoff Wallpack

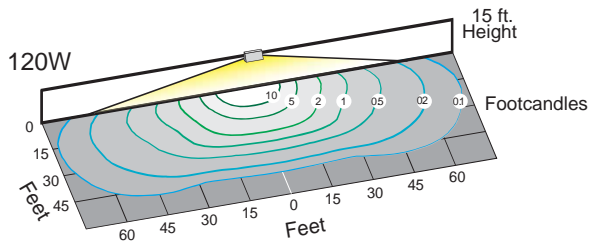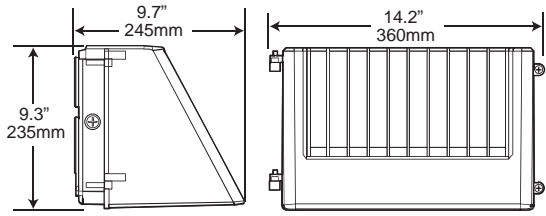

Luminous Intensity Distribution Diagram

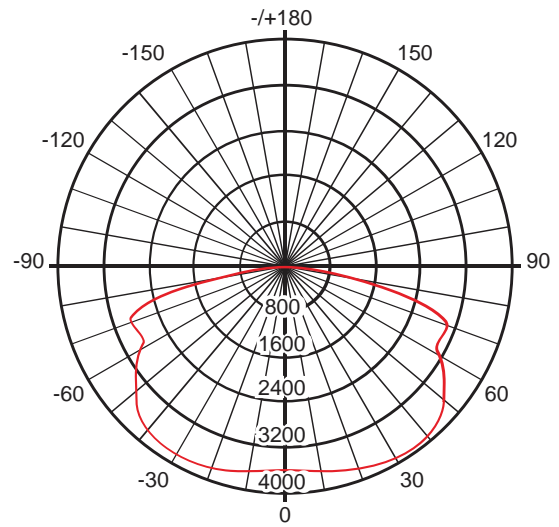

(800) 451-2606
 Fax: (800) 451-2605
 2451 Enterprise Parkway East
 Twinsburg, Ohio 44087 USA
 E-mail: venture@adlt.com
VentureLighting.com

