


CCT Selectable Switch
Wattage Selectable Switch

Description

Venture Lighting's color temperature selectable and wattage selectable luminaire is capable of changing to 3 different CCT settings and 5 different wattage settings. These field-adjustable fixtures are preset to the highest wattage (can be adjusted via an internal rotary switch) and 5000K CCT (can be adjusted via an internal slide switch). The flexible selection capability allows for a cost-effective method to reduce stocking inventory to 1 SKU instead of 15. This LED luminaire is designed for great performance, long life, and low maintenance.

Construction

The rugged die-cast aluminum housing is powder-coated for superior corrosion resistance and is provided with a premium stripe glass lens. The high-performance LED sources are mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency. The fixture has a gasket seal to eliminate the threat of contaminants damaging the components. The standard fixture color is bronze, custom colors are available upon request.

Electrical

The power supply has a range of 120-277V, 50/60Hz.

An integrated button photocell is included (it can be disabled if desired).

Mounting

The fixture can be wall mounted to a recessed junction box or surface mounted conduit (knockouts are available for 3/4" NPT and 1/2" NPT). This LED traditional style wallpack has the same mounting footprint size as HID 400W wallpacks.

Warranty

For warranty information refer to:

<https://www.venturelighting.com/resources/warranties.html>

Notes: *Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21.

**Dimming available when wattage selectability is NOT used.



DLC Model# WH5LUNV-150BSGD-BRW50

Product Performance

Wattage	3000K CCT Lumen Output	4000K CCT Lumen Output	5000K CCT Lumen Output
150W	21514	23223	21438
130W	17940	19370	17810
110W	15180	16390	15070
90W	12420	13410	12330
70W	9660	10430	9590
Color Rendering Index (CRI)		≥ 80	
Lumen Maintenance @50,000 Hrs*		90%	
Calculated L70 @25°C Ambient (Hrs)*		174,000	
Replaces HID Wattage		Up To 400W	
Operating Temperature Range		-40°F to +104°F (-40°C to +40°C)	

Physical Characteristics

Fixture Color	Bronze
Length	17.87"
Width	9.41"
Height	8.98"
Weight	11.5 lbs

Electrical Characteristics

Input	120-277VAC 50/60Hz 1.53A Max
Power Factor	≥ 90%
THD	≤ 10%
Dimming**	0/1-10V DC continuous to 10%

Regulatory Qualifications

UL Listed

DLC® Premium Qualified – Model# WH5LUNV-150BSGD-BRW50


IP65 Rated – Suitable for wet locations

Accessories


SP12714 120-277V Surge Protector

Venture 150W LED Traditional Style Wallpack

Dimensions

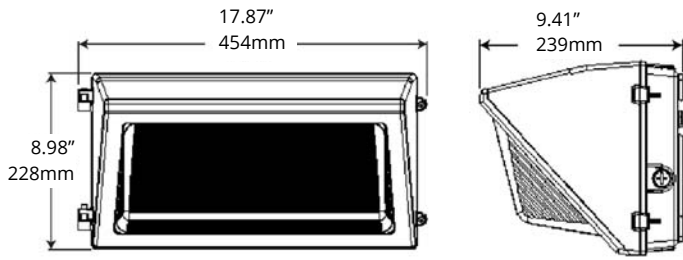

Photometrics (Scale 20:1, 12FT MH)

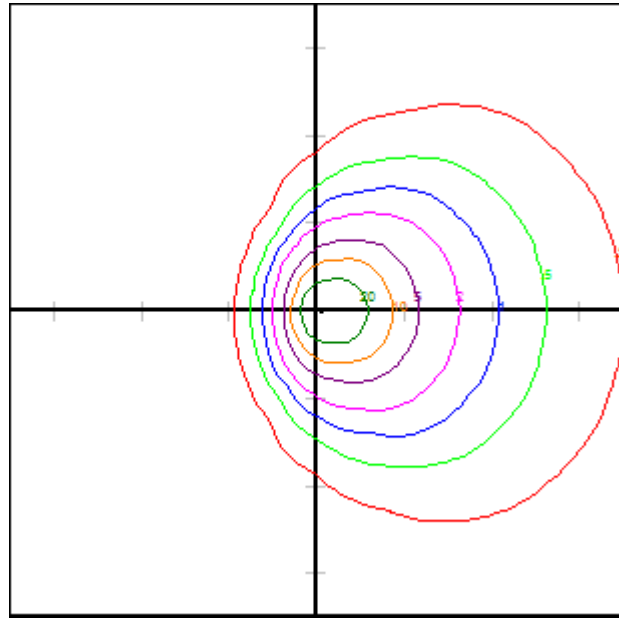

(800) 451-2606

7905 Cochran Road, Suite 300

Glenwillow, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

