HIGHBAY LIGHTING







A DIFFERENT WAY OF LIGHT

COMMERCIAL/INDUSTRIAL APPLICATIONS





Linear

- Available in 162W and 320W in 120-277V configurations as well as 110W and 320W in 347-480V configurations
- Clear or frosted lens versions available
- V-hook (2pcs) and 42" chain accessories supplied
- Versatile and easy to install pendant or surface mount accessories sold separately

• Optional wire guard available



Wave

- Perfect aisle lighter with polycarbonate lens achieves
 60 x 90 distribution
- Available in 90W in 120-277V configurations
- Optical chamber is sealed and gasketed
- 0-10V DC dimming standard
 - (2) aircraft cables included with fixture for mounting

A DIFFERENT WAY OF LIGHT 1

Modern


- Available in 90W, 150W, 200W, 300W in 120-277V configurations as well as 100W, 150W, 200W, 300W in 347-480V configurations
- 5000K color temperature, 4000K versions available, contact for lead time

VSolution

- Available in 150W in 120-277V configurations
- Easy, economical lighting upgrade
- Efficacy up to 130 lumens per watt
- IP65 Rating
- CCT: 5000K
- Beam angle: 90° standard
- 0-10V DC dimming standard



FOOD PROCESSING APPLICATIONS

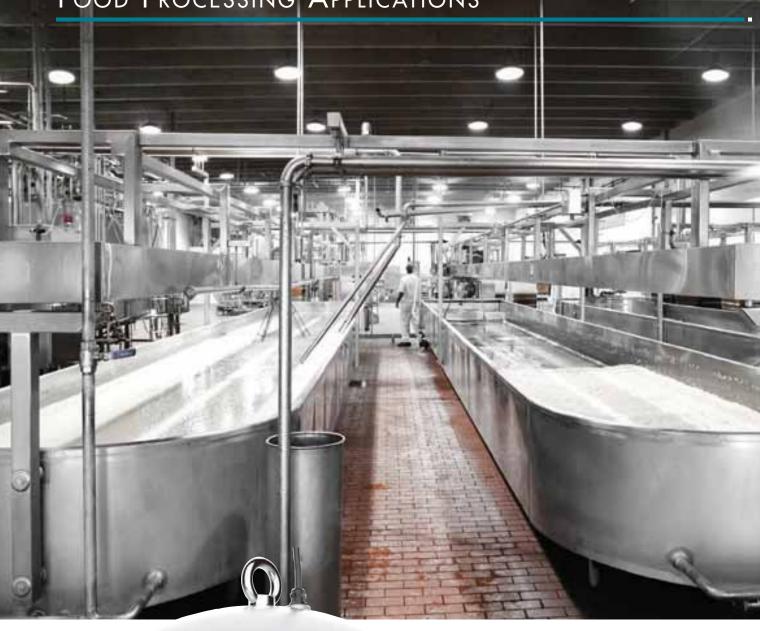





Note: * NSF Certified for General Lighting, not for food contact





• Polycarbonate lens: safe for food processing applications

• Beam angle: 90° standard; optional 50° and 120° beam

• Operating temperature: -40°C up to 50°C

• Body and mounting loop are Aluminum alloy

VSplash

• IP69K washdown rated

angles available

• Stainless steel hardware

• Available in 100W, 150W and 200W

4000K and 5000K color temperature
NSF Certified for food production areas
Efficacy up to 130 lumens per watt
Electrical: 120-277V 50/60Hz
No external reflectors required



(800) 451-2606 6675 Parkland Blvd, Suite 100 Solon, OH 44139 USA E-mail: Venture_Lighting@VentureLighting.com VentureLighting.com