

# 175 Watt Pulse Start Lamp

# 31928 DATA SHEET



**UNI-FORM**  
PULSE START METAL HALIDE LIGHTING SYSTEMS

## MP 175W/C/U/PS/737 GENERAL Characteristics

|                    |                             |
|--------------------|-----------------------------|
| Lamp Type          | MH Pulse Start Single Ended |
| ANSI Code          | M137, M152/0                |
| Bulb Shape         | ED28                        |
| Base Type          | Mogul (EX39)                |
| Bulb Finish        | Coated                      |
| Rated Life (V)     | 15000 hours                 |
| Rated Life (H)     | 11250 hours                 |
| Operating Position | Universal                   |

## ELECTRICAL

|                           |     |
|---------------------------|-----|
| Lamp Watts                | 175 |
| Lamp Oper. Voltage (Nom.) | 132 |

## SUSTAINABILITY

|   |      |
|---|------|
| Mercury Amount (mg)                     | 21.0 |
| Picograms of Hg per Mean Lumen Hour (V) | 111  |

## PHOTOMETRIC


|                                    |                         |
|------------------------------------|-------------------------|
| Initial Lumens / LPW (V)           | 15800 / 90              |
| Initial Lumens / LPW (H)           | 14200 / 81              |
| Lamp Lumen Depreciation (LLD)      | 0.80 (80%) @ 6000 hours |
| Correlated Color Temperature       | 3700K                   |
| Chromaticity Coordinates (CIE-x,y) | .395 .390               |
| Color Rendering Index (CRI) $R_a$  | 70                      |

## PHYSICAL


|                            |                       |
|----------------------------|-----------------------|
| Bulb Diameter              | 3.5" (90mm)           |
| Max. Overall Length (MOL)  | 8.3" (211mm)          |
| Light Center Length (LCL)  | 5.0" (127mm)          |
| Effective Arc Length       | 21.6mm                |
| Max. Base Temperature (°C) | 210                   |
| Max. Bulb Temperature (°C) | 400                   |
| Socket Pulse Rating (KV)   | 4                     |
| Luminaire Type             | Open / Enclosed Rated |

## NOTES




- Nominal color temperature rating is based on Vertical ( $\pm 15^\circ$ ) operation of the lamp. Off-vertical positions will result in higher color temperature.
- Minimum Starting Temperature:  $-40^\circ\text{C}/^\circ\text{F}$ .



**ED28**



Dia. = 3.5" (90mm)  
MOL = 8.3" (211mm)  
LCL = 5.0" (127mm)  
Base = Mogul (EX39)

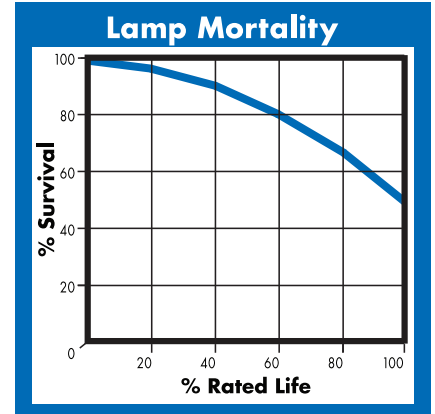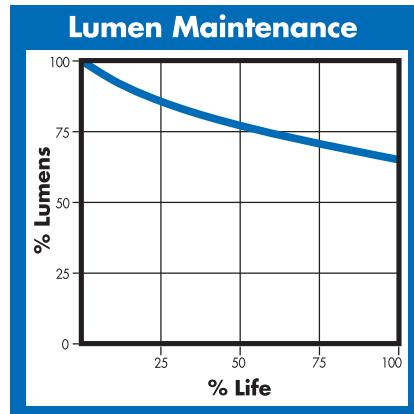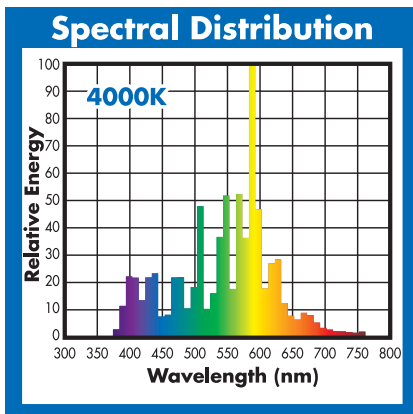

**(800) 451-2606**

6675 Parkland Blvd., Suite 100  
Solon, Ohio 44139 USA

E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

**VentureLighting.com**

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30  
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.