



## Description

The Venture Lighting LED parking garage series or luminaires are low profile, lightweight, and designed for long life and low maintenance. The fixtures are designed to allow for easy replacement of existing parking garage lighting fixtures. The robust design paired with universal mounting makes them ideal for upgrading existing parking garage fixtures. The fixture version with sensor comes standard with a Wattstopper FSP211 Occupancy and Daylight sensor pre-installed. 0-100% dimming capability with sensor.

## Construction

The housing unit is constructed from heavy-duty aluminum. Fixtures are finished with a durable white polyester powder coating. To ensure weather-tight protection, each optical assembly is sealed with a silicone gasket. Each unit is ETL certified to withstand wet locations. Luminaires are rated for an ambient operating temperature range of -40°C to 40°C.

## Optics

High-performance, UV stabilized acrylic optics are used to achieve precise photometric distributions.

## Electrical

The Class II power supply has a range of 120-277V, 50/60 Hz. The high-performance LEDs are rated up to 190,000 hours at 25°C ambient temperature. 0-10V dimming capability is standard. Each fixture has a built-in 10kV surge protector.

## Mounting

The fixture is designed for universal surface and pendant mounting. IT IS THE CUSTOMER'S RESPONSIBILITY TO VERIFY THE AVAILABILITY OF ADEQUATE SPACE FOR INSTALLATION.

## Warranty

For warranty information refer to: [www.venturelighting.com/resources/warranties](http://www.venturelighting.com/resources/warranties)

## Notes

\*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21

## Product Performance

|   |                                |
|---|--------------------------------|
| Wattage                                 | 54W                            |
| Lumens                                  | 6160                           |
| Correlated Color Temperature (CCT)      | 5000K                          |
| Color Rendering Index (CRI)             | 70+                            |
| Lumen Maintenance @50,000 hours*        | 98%                            |
| Calculated L70 @ 25°C Ambient in Hours* | >500,000                       |
| Integrated Sensor Included              | No                             |
| Replaces HID Wattage                    | 175W                           |
| Operating Temperature Range             | -40°F to 104°F (-40°C to 40°C) |

## Physical Characteristics

|               |         |
|---------------|---------|
| Fixture Color | White   |
| Length        | 12"     |
| Width         | 12"     |
| Height        | 2.4"    |
| Weight        | 6.8 lbs |

## Electrical Characteristics

|                                  |                                     |
|----------------------------------|-------------------------------------|
| Amperage Draw (Input Volts/Amps) | 120/0.46 208/0.27 240/0.24 277/0.22 |
| Surge Protection                 | 10kA                                |

## Regulatory Qualifications

|                         |
|-------------------------|
| cETLus Listed           |
| Rated for wet locations |




## Accessories

|                                    |
|------------------------------------|
| SP12714 – 120-277V Surge Protector |
|------------------------------------|

Revision: 05, 01-Jul 2022

# Venture 54W LED Garage Light

## Dimensions

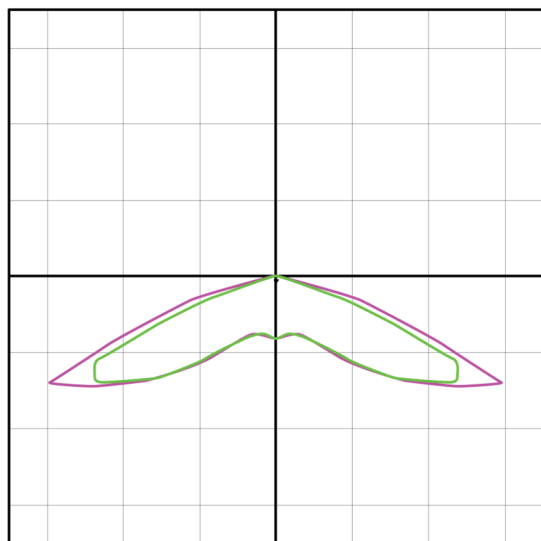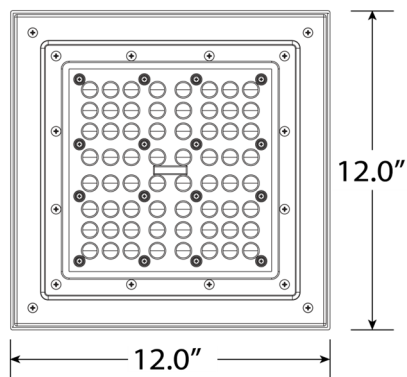

Wide Distribution\*

Max Cd 45° H  
0° H  
90° H

BUG Rating B3-U0-G1

**(800) 451-2606**

7905 Cochran Road, Suite 300

Glenwillow, Ohio 44139 USA

Email: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

**VentureLighting.com**

