



Description

VFlood is a low profile, lightweight LED Flood Light fixture, designed for long life and low maintenance. The fixtures are designed to quickly and easily upgrade existing flood fixtures.

Construction

The housing unit is constructed from heavy-duty, die cast aluminum. Fixtures are finished with a durable bronze polyester powder coating. To ensure weathertight protection and to keep out contaminants, each optical assembly is sealed with a gasket. Each unit is rated for wet locations.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. The high-performance LED fixtures are rated up to 50,000 hours. These fixtures are not dimmable.

Mounting

Fixtures come standard with knuckle mount with a 1/2" NPS nipple. An accessory U-bracket can also be purchased separately for yoke applications.

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

Product Performance

Wattage	20W
Lumens	2250
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	75+
Lumen Maintenance @ 50,000 hours*	90%
Calculated L70 @ 25°C Ambient in Hours*	163,000
Replaces HID Wattage	70-100W
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

Physical Characteristics

Fixture Color	Bronze
Length	4.13"
Width	6.69"
Height	4.72"
Weight	3.8 lbs

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.20 208/0.12 240/0.10 277/0.09
Surge Protection	10kA

Regulatory Qualifications

cETLus Listed
Rated for wet locations

Accessories

KT56256 – U-bracket accessory kit 20W-50W Roundback Flood
SP12714 – 120-277V Surge Protector



Revision: 07, 26-Aug 2022

Notes

*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21



Venture VFlood – 20W LED Flood Light

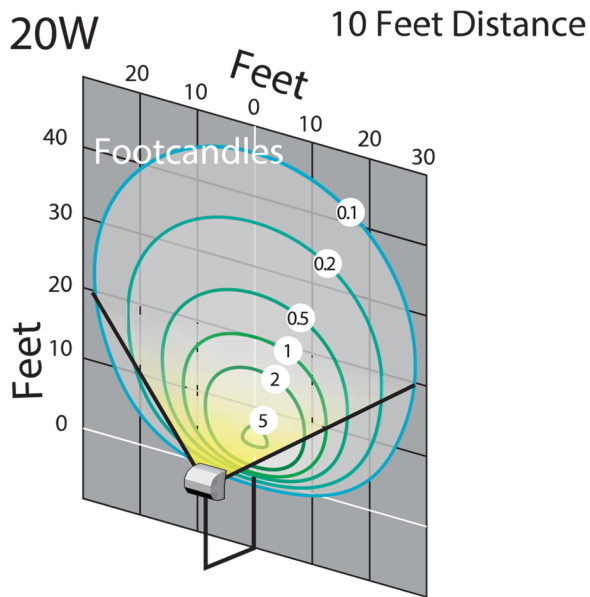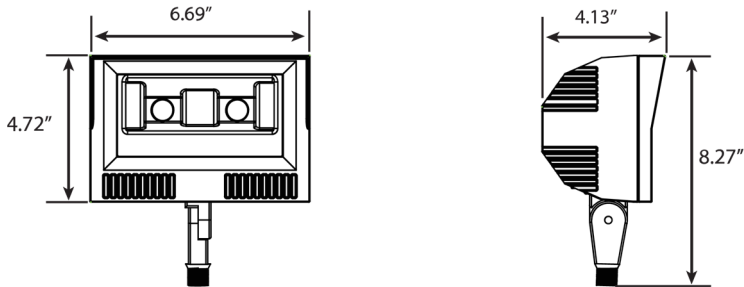

(800) 451-2606

6675 Parkland Blvd., Suite 100

Solon, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

