



Description

Venture Lighting's Modern High Bay luminaires are low profile, durable, and designed for long life and low maintenance. They are designed to upgrade quickly and easily existing H.I.D. and fluorescent fixtures.

Construction

The high-performance LED source is mounted to an aluminum heat sink which is designed to ensure proper thermal management of the system. This design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency. Fixtures are rated for an ambient operating temperature range -22°F to 104°F (-30°C to 40°C). Modern high bay luminaires are water and dust resistant, with IP65 rating.

Optics

The 200W units are equipped with a 90 degree beam spread for higher mounting heights and are also field adjustable with an accessory lens.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. 0-10V DC dimming capability is standard. The luminaire is rated for damp and dry locations.

Application Notes

Can be used for natatorium applications.

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

Notes

* Lumen maintenance data is based on LED testing per IES LM-80 and projected per IES TM-21

Product Performance

Wattage	200W
Lumens	26000
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	80
Lumen Maintenance @50,000 Hours*	92%
Calculated L70 @25°C Ambient (Hrs)*	223,000
Replaces HID Wattage	750W
Spacing Criterion (0-180)	1.3 x mtg height
Spacing Criterion (90-270)	1.3 x mtg height
Beam Angle (°)	90°
Operating Temperature Range	-22°F to 104°F (-30°C to 40°C)

Physical Characteristics

Input Cable Length	5ft.
Safety Cable Length	3ft.
Fixture Color	White Housing with Black Driver & Cable
Length	15.1" dia.
Height	8.1"
Weight	16.1 lbs

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/1.69 208/0.97 240/0.85 277/0.73
Surge Protection	4kV

Regulatory Qualifications

cULus Listed

Accessories

AC26546 – Adjustable Bracket Kit, White (100-240W)
AC78196 – 150-200W Pendant Mount Kit (White) for 3/4" NPT
LN13632 – 120 Degree Plastic Lens for 100-300W Highbay
LN13421 – 120 Degree Clear Tempered Glass Flat Lens
LN13492 – Frosted Polycarbonate Lens for 100-300W Highbay
LN28431 – 50 Degree Lens for 100-200W Highbay (except 200W High Temp)
RF13912 – 16.5" Dia. Acrylic Reflector for 100-300W Highbay
RF13388 – 15.3" Dia. Alum. Shield for 100-300W Highbay (Silver)
Add suffix "-S1" for factory installed fixture with Motion Only sensor (PH41623)
Add suffix "-S2" for factory installed fixture with Motion/Dim/Photocell sensor (PH77409)
Add suffix "-S3" for factory installed fixture with Wet & Low Rated Motion Only sensor (PH21458)
Add suffix "-S4" for factory installed fixture with Wet & Low Rated Motion/Dim/Photocell sensor (PH27419)
For factory installed plug options see below
For plug options see accessories tab (NOT FACTORY INSTALLED)

Revision: 06, 01-Jul 2022



Venture 200W LED High Bay Fixture



RF13912



RF13388




LN13632



LN28431

Luminous Intensity Distribution Diagram

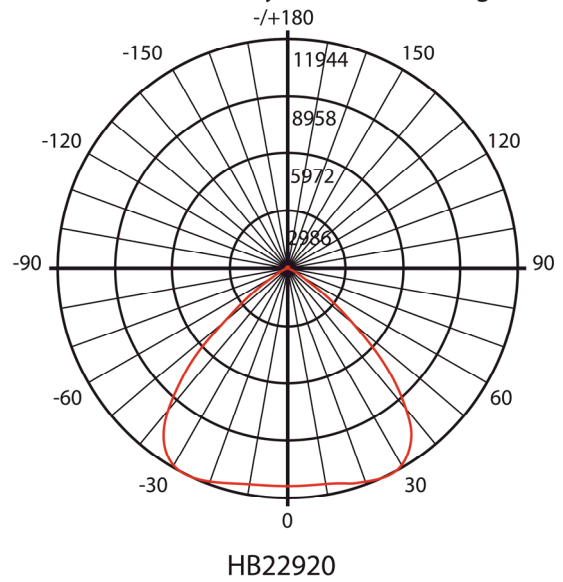

NEMA L5-15P



NEMA L18-20P



NEMA L6-15P



NEMA L7-15P

Plug Options*	Molded Plug Options with 11ft Cable*
"-P1" - NEMA L5-15P for 120V	"-P6-C" - NEMA L5-15P for 120V w/ Cable
"-P2" - NEMA L6-15P for 240V	"-P7-C" - NEMA L6-15P for 240V w/ Cable
"-P3" - NEMA L7-15P for 277V	"-P8-C" - NEMA L7-15P for 277V w/ Cable
"-P5" - NEMA L18-20P for 208V	"-P10-C" - NEMA L18-20P for 208V w/ Cable

NOTE: * Add Suffix to Part# for Factory Installed option
Factory installed plug options

(800) 451-2606

7905 Cochran Road, Suite 300

Glenwillow, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

