



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Feature & Benefits

- Replaces MH or HPS up to 50W
- Replaces CFL up to 23W
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs

Applications

- Post top
- Wallpack
- Area lighting
- Flood lighting
- Garage lighting
- General illumination

Notes

- The use of an external surge protection device is recommended
- Operating temp. range between -40°F and 122°F (-40°C and 50°C)
- Suitable for use in dry and damp environments
- Suitable for use in portable, surface mounted and ceiling luminaires
- Suitable for use in open and enclosed luminaires
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire
- Lamps have clear polycarbonate cover lenses

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

Product Performance

Input Power (W)	8
Initial Lumens	1100
Lumens/Watt	140
Correlated Color Temperature (CCT)	3000K
Color Rendering Index (CRI)	80
Life Hours	50000
Min. Lamp Compartment (H x L x W)	8.5" x 6.0" x 6.0" (216mm x 152mm x 152mm)
Dimming	No
Operating Temperature Range	-40°F to 122°F (-40°C to 50°C)

Physical Characteristics

Base Type	Medium (E26)
Overall Length A	4.84" (123mm)
Diameter B	2.36" (59mm)
Weight	0.49 lbs (220 g)

Electrical Characteristics

Input Voltage Range	100-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	≥ 90%
THD	≤ 20%

Regulatory Qualifications


cULus Listed (UL 1993/CSA C22.2 No. 1993)

Accessories

SP12714 120-277V Surge Protector

Revision: 03, 07-Sept 2022

Venture 8W LED Retrofit Lamp

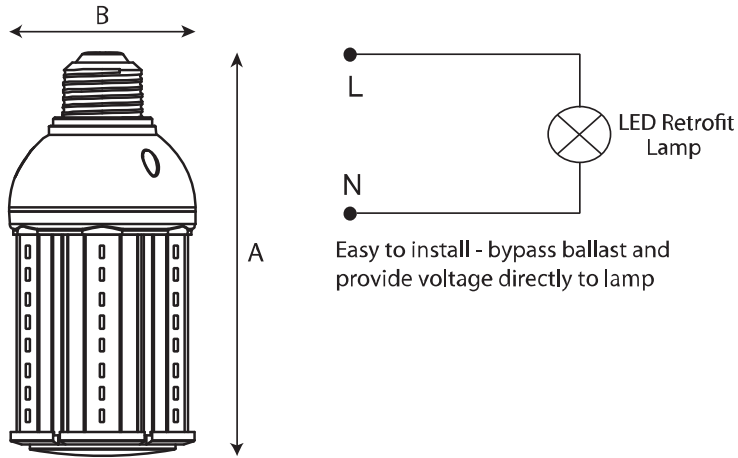

(800) 451-2606

6675 Parkland Blvd., Suite 100

Solon, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

