



Description

Venture's LED Wrap fixture is a lightweight LED Fixture, designed for long life and low maintenance. The fixtures are designed to quickly and easily upgrade existing fluorescent fixtures.

Construction

The enclosure is constructed from steel (finished with a durable white polyester powder coating) and plastic end caps. Each fixture utilizes a specially engineered acrylic (PPMA) frosted optic which is designed to have low glare yet maximize the product performance.

Electrical

The power supply has a range of 120-277V, 50/60 HZ. 1-10V DC continuous dimming capability is standard.

Mounting

Suitable for surface mount or suspension mount applications.

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

DLC® Model No.: SM2-40N8D4-04

Product Performance

Wattage	40W
Lumen Output	4640
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	≥80
Lumen Maintenance @50,000 Hrs*	90%
Calculated L70 @25°C Ambient (Hrs)*	161,000
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)

Physical Characteristics

Fixture Color	White
Length	47.6" (1210mm)
Width	5.3" (134.9mm)
Height	2.1" (54.4mm)
Weight	3.75 lbs (1.70kg)

Electrical Characteristics

Input	120-277V, 50/60 Hz, 0.32A Max
Power Factor	≥90%
THD	<20%
Dimming	1-10V DC continuous to 10%

Regulatory Qualifications

cULus Listed
DLC® Qualified – Model # SM2-40N8D4-04
Damp location rated

Accessories

AC25420 – 3/8" 3-Wire 14/3 600V Max 6ft Flex Whip
Add suffix "-WP" for a factory installed fixture with 6ft whip (AC25420)

Revision: 06, 09-Sept 2022


Notes

*Lumen maintenance data is based on LED testing per IES LM-80 and projected per IES TM-21




Venture 4ft LED Wrap Fixture

Dimensions

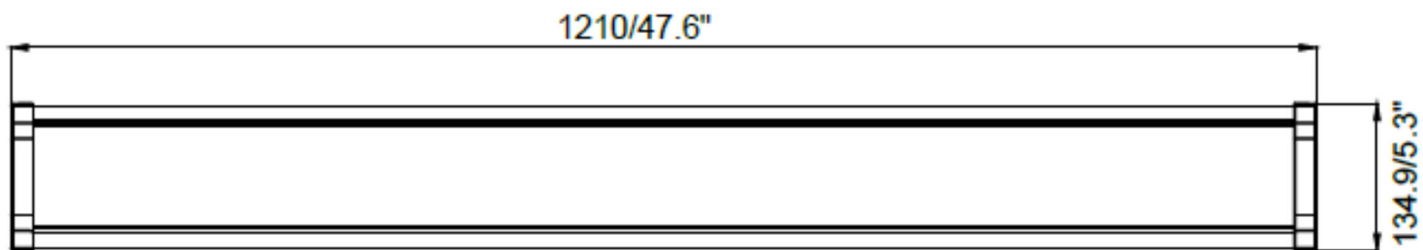

Photometrics

Luminous Intensity Distribution Diagram

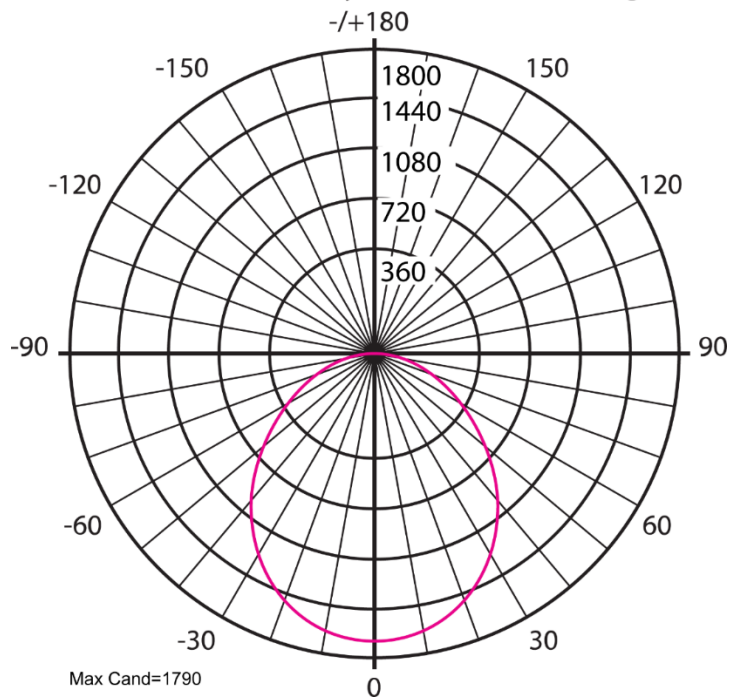

(800) 451-2606

6675 Parkland Blvd., Suite 100

Solon, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

