

Description

Venture Lighting's Select-Pro LED Vapor Tight fixtures are color temperature and wattage selectable. These field-adjustable fixtures can change to 3 different CCT settings and 3 different wattage settings. Each fixture is preset to the highest wattage and 5000K CCT. Venture Lighting's Select-Pro LED Vapor Tight fixtures are designed for use under corrugated roof applications, utility lighting, maintenance areas, parking garages, and tunnels.

Construction

The fixture is a non-corrosive construction with a one-piece polycarbonate housing and lens. The diffuse gasketed lens is secured by non-corrosive stainless-steel clips. This versatile fixture is IP65 rated.

Electrical

Fixtures are provided with 120-277V 50/60 Hz drivers with 0-10V DC continuous dimming capability to 10%.

Mounting

Fixtures are supplied with surface mounting clips and V-hooks for chain mounting (chain not included). The lightweight design allows for easy installation/replacement of existing fixtures.

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

DLC Model# VP4SA-45/38/34-835/40/50

Product Performance

Wattage	3500K CCT	4000K CCT	5000K CCT
	Lumen Output	Lumen Output	Lumen Output
45W	5940	5985	6030
38W	5130	5168	5206
34W	4692	4726	4760
Color Rendering Index (CRI)			≥80
Lumen Maintenance @50,000 Hrs*			90%
Calculated L70 @25°C Ambient (Hrs)*			163,000
Operating Temperature Range		-40°F to 104°F (-40°C to 40°C)	

Physical Characteristics

Fixture Color	Gray
Length	47.2"
Width	3.5"
Height	3.1"
Weight	4.41 lbs

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120-277V 0.37A Max
----------------------------------	--------------------

Regulatory Qualifications

cULus Listed

DLC® Qualified

IP65 Rating – Suitable for Wet Locations

NEMA Type 4X Enclosure Rating

Accessories



EM – add suffix "EM" to order code for a factory installed Battery Backup

SP12714 – 120-277V Surge Protector

PH58143 – Wet Rated Motion Only Control Sensor – Long Extension

PH52171 – Wet Rated Motion/Photocell/Dimming Control Sensor – Long Extension

Venture LED Vapor Tight

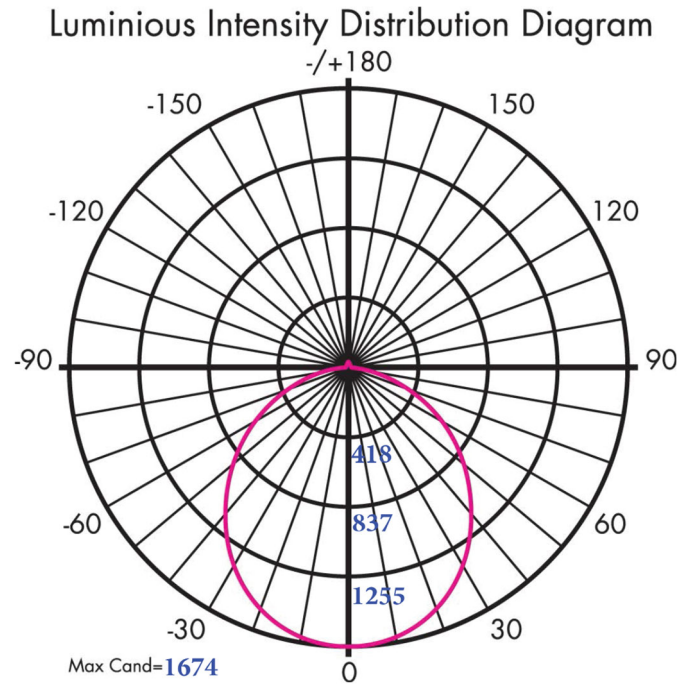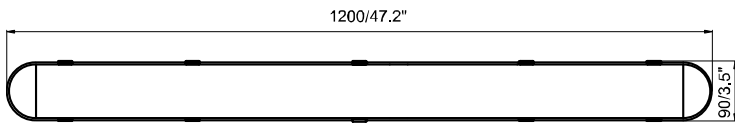

(800) 451-2606

7905 Cochran Road, Suite 300

Glenwillow, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

