



Description

Venture Lighting's Wallpack luminaires are low profile, lightweight, and designed for long life with low maintenance and great performance. These LED luminaires are designed to quickly and easily upgrade existing HID wallpack fixtures.

Construction

Rugged die case housing finished in a durable powder coat finish and with polycarbonate lens. The high-performance LED sources are mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency. The fixture has a gasket sealed to eliminate the threat of contaminants damaging the components. The standard fixture color is bronze, custom colors available upon request.

Electrical

The power supply has a range of 120-277V, 50/60Hz. The luminaires are IP65 rated, suitable for wet locations. Button photocell accessory can easily be mounted into the fixture. Fixture is not dimmable.

Mounting

Fixture can easily be wall mounted to a recessed junction box or be wall mounted and accept a 1/2" NPT surface mounted conduit. The 80W Venture LED traditional style wallpack has the same footprint as HID 250W wallpacks.

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

Notes

*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21.

†Temperature range for battery back-up

Product Performance

Wattage	80W
Lumens	9660
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Lumen Maintenance @50,000 Hrs*	81%
Life Hours	89000
Replaces HID Wattage	250W
Operating Temperature Range	-40°F to +104°F (-40°C to +40°C)

Physical Characteristics

Fixture Color	Bronze
Length	9.92"
Width	14.2"
Height	9.25"
Weight	10 lbs

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.69 208/0.40 240/0.35 277/0.30
----------------------------------	-------------------------------------

Regulatory Qualifications

UL Listed

IP65 Rated – Suitable for wet locations

Accessories

SP12714 – 120-277V Surge Protector

PH56903 – Button Photocell (120-277V)

Add suffix "-P" for a factory installed fixture with a Button Photocell (PH56903)


Add suffix "-EM" for a factory installed fixture with Battery Backup (Lumens: 1951)(0-50°C)†

Revision: 07, 09-Sept 2022




Venture 80W LED Traditional Style Wallpack

Dimensions

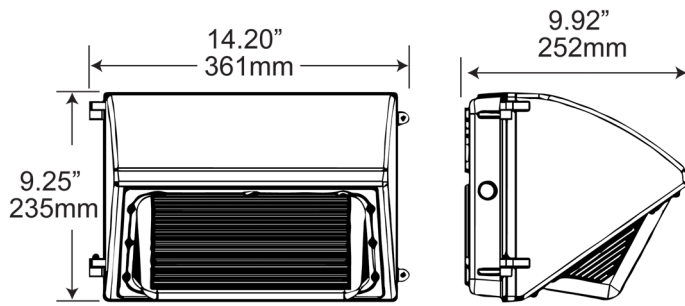

80W

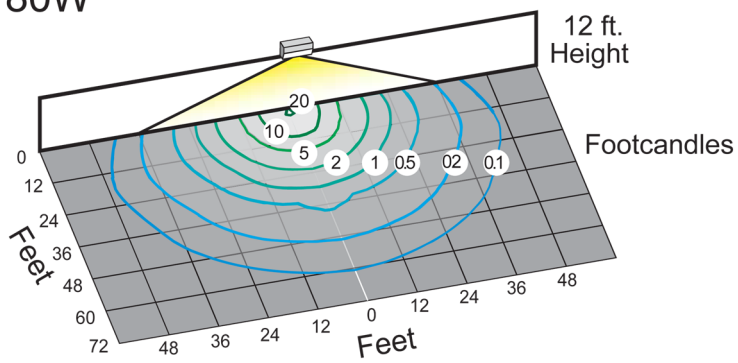

(800) 451-2606

6675 Parkland Blvd, Suite 100

Solon, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

