



Description

Venture Lighting's VWallpax luminaires are low profile, lightweight, and designed for long life with low maintenance and great performance. These LED luminaires are designed to quickly and easily upgrade existing wallpack fixtures.

Construction

Rugged die cast housing finished in a durable powder coat finish and with glass lens. The high-performance LED sources are mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency and sealed to eliminate the threat of contaminants damaging the components. The standard fixture color is bronze, custom colors available upon request.

Electrical

The power supply has a range of 120-277V, 50/60Hz. The luminaires are rated for wet locations. Button photocell accessory can easily be mounted into the fixture. These fixtures are not dimmable.

Mounting

Each fixture is easily installed to a standard recessed junction box. Slipfitter conversion kit can be used for flood lighting applications.

Warranty

For warranty information refer to: www.venturelighting.com/resources/warranties

Notes

*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21.

Product Performance

Wattage	80W
Lumens	8710
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	75
Lumen Maintenance @50,000 Hrs*	99%
Calculated L70 @ 25°C Ambient in Hours*	>500,000
Replaces HID Wattage	250W
Operating Temperature Range	-40°F to +104°F (-40°C to +40°C)

Physical Characteristics

Fixture Color	Bronze
Length	11.81"
Width	5.94"
Height	10.24"
Weight	11.3 lbs

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.68 208/0.43 240/0.37 277/0.33
Surge Protection	10kA

Regulatory Qualifications

cETLus Listed
 Rated for wet locations


Accessories

SP12714 – 120-277V Surge Protector
 PH56903 – Button Photocell (120-277V)
 KT24989 – Slipfitter Mount Conversion Kit - Bronze

Revision: 05, 01-Jul 2022

Venture VWallpax - 80W LED Wallpack

Dimensions

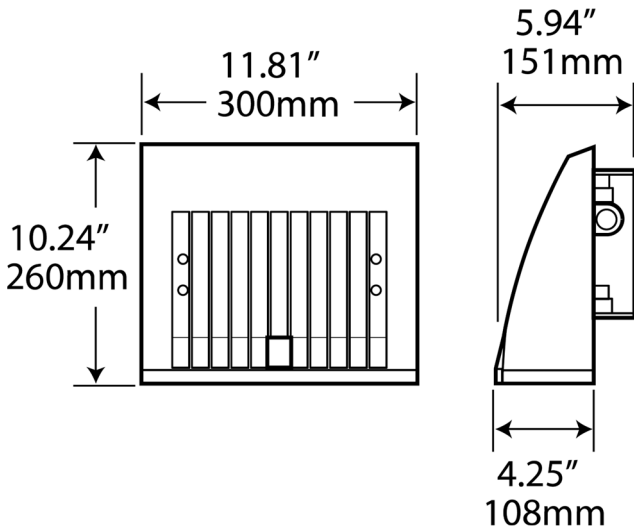


Fixture with
KT24989 attached

KT24989 slipfitter is supplied with 3 wires, not shown, for easy installation.



80W

15 ft.
Height

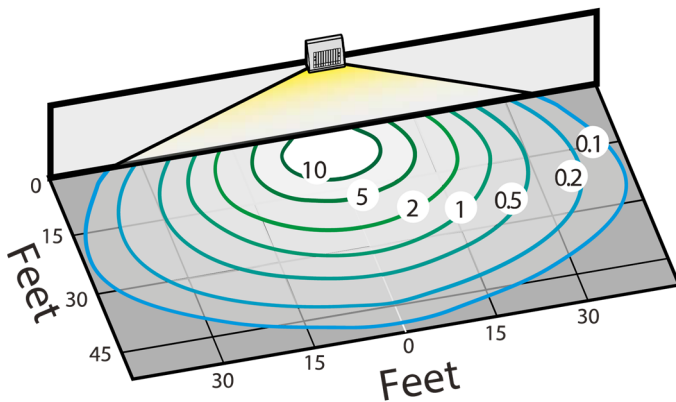

BUG Rating B2-U1-G1

(800) 451-2606

7905 Cochran Road, Suite 300

Glenwillow, Ohio 44139 USA

Email: Venture_Lighting@VentureLighting.com

VentureLighting.com

