

Model# OR-040AA-E26-4K



### Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

### Features & Benefits

- Energy saving replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs

### Applications

- Lowbay
- Canopy
- Garage
- General Illumination

### Notes

The use of an external surge protection device is recommended. Operating temperature range between -4°F and 122°F (-20°C and 50°C). Suitable for use in portable luminaires, surface mounted and ceiling luminaires.

Suitable for use in open or enclosed luminaires with a minimum lamp compartment dimensions of 8 inch diameter x 11 inch long.

Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.

### Product Performance

Input Power (W)	40
Bare Lamp Lumens	4800
Lumens/Watt (Bare Lamp)	120
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Life Hours	50000
Dimming	No
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)

### Physical Characteristics

Base Type	Medium, (E26)
Overall Length A	6.01" (153mm)
Diameter B	5.2" (131mm)
Weight	2.06 lbs (933g)

### Electrical Characteristics

Input Voltage Range	100V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

### Regulatory Qualifications

cULus Listed


cULus Classified (UL 1598C)

### Accessories


SP12714 - 120-277V Surge protection



# Venture 40W LED Retrofit Lamp

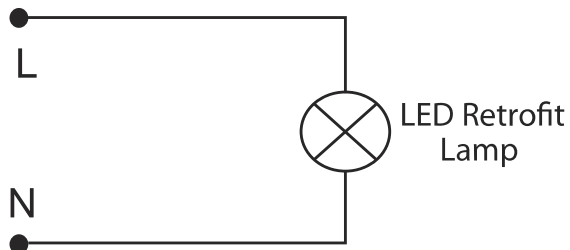

Easy to install - bypass ballast and provide voltage directly to lamp

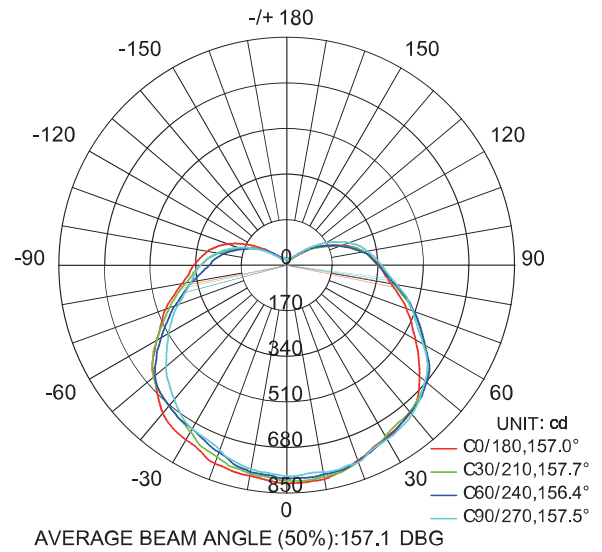

(800) 451-2606  
Fax: (800) 451-2605  
7905 Cochran Rd, Suite 300  
Glenwillow, Ohio 44139  
E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)  
[VentureLighting.com](http://VentureLighting.com)

