



## Description

Venture's LED Vapor Tight fixtures are designed for use in harsh environments such as utility lighting, maintenance areas, parking garage and tunnels.

## Construction

The fixture is a non-corrosive construction with a one-piece polycarbonate housing and lens. The diffuse gasketed lens is secured by non-corrosive stainless steel clips. The versatile fixtures not only are IP65 rated, but also have been tested to the NEMA Type 4X enclosure rating which enables these fixtures to be used in a variety of harsh applications.

## Electrical

Fixtures are provided with 120-277V 50/60 Hz drivers with 0-10V DC continuous dimming capability to 10%.

## Mounting

Fixtures are supplied with surface mounting clips and V-Hooks for chain mounting (chain not included). The lightweight design allows for easy installation/replacement of existing fixtures.

## Warranty

For warranty information refer to: <https://www.venturelighting.com/resources/warranties>

DLC® Model# VP4-38N8D-BF6

## Product Performance

Wattage	38W
Lumens	5092
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Lumen Maintenance @50,000 hours*	91%
Calculated L70 @ 25°C Ambient in Hours*	186,000
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

## Physical Characteristics

Fixture Color	Gray
Length	49.8"
Width	5.0"
Height	3.5"

## Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120-277V 0.37A Max
----------------------------------	--------------------

## Regulatory Qualifications

UL Listed	
Suitable for wet locations	
IP65 Rating	
NEMA Type 4X Enclosure Rating	
DLC Premium Qualified – Model # VP4-38N8D-BF6	

## Accessories



EM – add suffix "-EM" to order code for a factory installed Battery Backup
SP12714 – 120-277V Surge Protector
PH58143 – Wet Rated Motion Only Control Sensor – Long Extension
PH52171 – Wet Rated Motion/Photocell/Dimming Control Sensor – Long Extension

## Notes:

\*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21



# Venture LED Vapor Tight

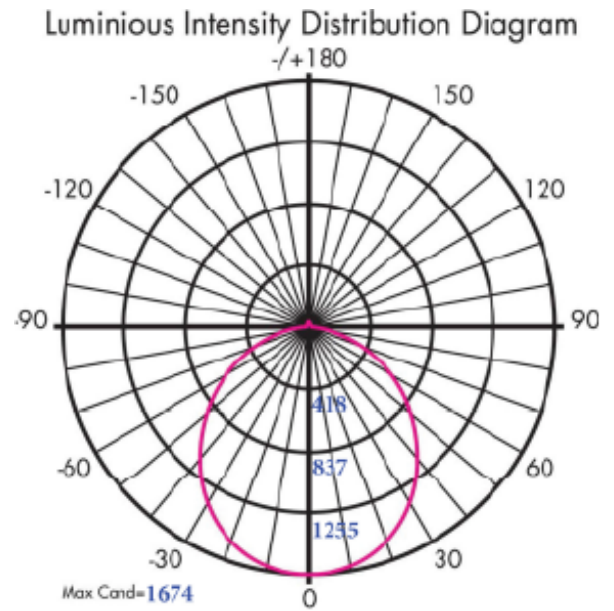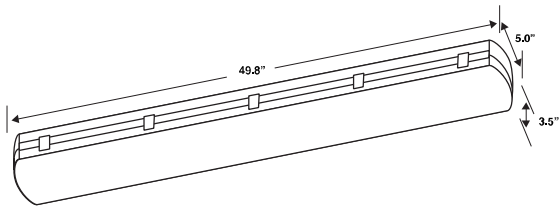

(800) 451-2606  
Fax: (800) 451-2605  
7905 Cochran Rd, Suite 300  
Glenwillow, Ohio 44139  
E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)  
[VentureLighting.com](http://VentureLighting.com)

